

TRANSPARENT BOUNDARY CONDITIONS FOR LOCALLY PERTURBED INFINITE HEXAGONAL PERIODIC MEDIA*

C.BESSE[†], J. COATLÉVEN[‡], S. FLISS[‡], I. LACROIX-VIOLET[†], AND K. RAMDANI[§]

Abstract. In this paper, we propose a strategy to determine the Dirichlet-to-Neumann (DtN) operator for infinite, lossy and locally perturbed hexagonal periodic media. We obtain a factorization of this operator involving two non local operators. The first one is a DtN type operator and corresponds to a half-space problem. The second one is a Dirichlet-to-Dirichlet (DtD) type operator related to the symmetry properties of the problem. The half-space DtN operator is characterized via Floquet-Bloch transform, a family of elementary strip problems and a family of stationary Riccati equations. The DtD operator is the solution of an a ne operator valued equation which can be reformulated as a non standard integral equation.

Key words. Transparent boundary conditions, DtN operator, periodic media, hexagonal lattice

AMS subject classifications. 35B27, 35J05, 35L05, 35Q40, 35Q60

1. Introduction and problem setting

Periodic media appear in many physical and engineering applications related to wave type systems. In solid state theory, it is well-known that the existence of insulators and conducting materials can be explained by the periodic properties of the crystal. More precisely, within the one-electron model of solids, electrons move under a Hamiltonian with periodic potential yielding the existence of band gaps (see for example Reed and Simon [34, p. 312]). In optics, many devices used in microtechnology and nanotechnology involve materials with such electromagnetic properties, known as photonic crystals. For a general introduction to the physics of photonic crystals, we refer the interested reader to the monographs by Joannopoulos *et al.* [23], Johnson and Joannopoulos [24], Sakoda [37] or the review paper by Busch *et al.* [8]. Concerning mathematical aspects related to photonic crystals, see for instance the book of Kuchment [28]. About twenty years ago, the analysis of elastic wave propagation in periodically structured media lead to the concept of phononic crystals (see for instance the book by Maldovan and Thomas [31]).

Photonic, phononic and real crystals (in solids) share a lot, although they concern materials involving quite different scales and types of waves (acoustic, electromagnetic, elastic). The main common feature, inherited from the periodic structure, is the appearance of band-gaps (forbidden bands), i.e. the strong attenuation of a certain range of frequencies (at least in some directions). This phenomenon is due to the fact that an incident wave on the crystal is multiply scattered by the periodic structure, leading to possibly destructive interference (depending on the characteristics of the crystal and the wave frequency).

*The authors are partially supported by the French ANR fundings under the project MicroWave NT09_460489.

[†]Laboratoire Paul Painlevé, Université Lille Nord de France, CNRS UMR 8524, INRIA SIMPAF Team, Université Lille 1 Sciences et Technologies, Cité Scientifique, 59655 Villeneuve d'Ascq Cedex, France. (Christophe.Besse@math.univ-lille1.fr, Ingrid.Violet@math.univ-lille1.fr).

[‡]Laboratoire POems (UMR 7231 CNRS-INRIA-ENSTA) 32, Boulevard Victor, 75739 PARIS Cedex 15 (sonia.fliss@ensta-paristech.fr, julien.coatleven@inria.fr).

[§]Université de Lorraine, IECN, UMR 7502, Vandoeuvre-lès-Nancy, F-54506, France.
CNRS, IECN, UMR 7502, Vandoeuvre-lès-Nancy, F-54506, France.
Inria, Villers-lès-Nancy, F-54600, France.(karim.ramdani@inria.fr)

Most applications involving periodic structures use these band gaps to control wave propagation properties of materials (see [8] for an extended list of references). More precisely, the aim can be to prohibit propagation of waves [35], allow propagation of some frequencies and/or some directions like in optical filters [33], localize waves by creating a defect in the periodic structure [30, 37], create optical nanocavities [1] or to guide waves with bends [39], Y-junctions [6] and T-junctions [14].

In the above applications, numerical simulation plays a crucial role in the design of photonic, phononic and real crystals. In particular, the problem of determining which

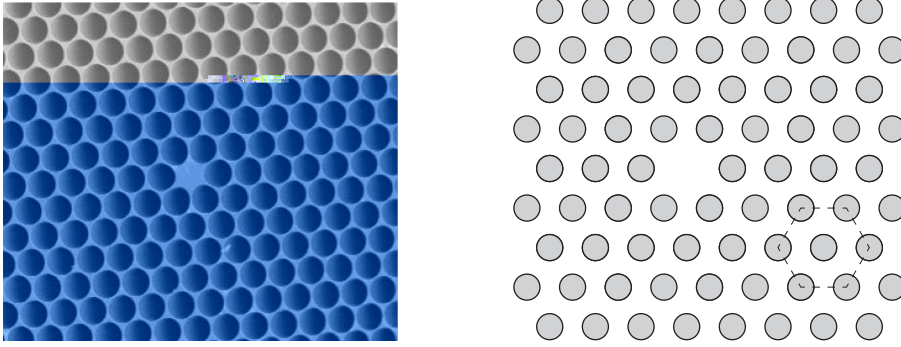


FIG. 1.1. A locally perturbed photonic crystal with triangular lattice (cross section of a photonic crystal optical fiber (left) and representation of the corresponding hexagonal periodicity cell (right)).

initially set on an unbounded domain to a problem set on a bounded one containing the defect cell. The differential operators involved are the ones describing the underlying physics of the problem under consideration, namely

- **Quantum mechanics:** in a (classical) crystal, the mathematical formulation of the problem leads to the **Schrödinger operator**

$$Au := -\Delta u + (V + ip)u \quad (1.1)$$

where $V(x)$ denotes the potential in the lattice and p is the Laplace variable.

- **Phononics:** the operator involved is the **elasticity system** (see [3, 4, 29, 32, 36, 40])

$$Au := -\operatorname{div} \boldsymbol{\sigma}(\mathbf{u}) + \omega^2 \rho \mathbf{u}, \quad (1.2)$$

where \mathbf{u} denotes the displacement and $\boldsymbol{\sigma}(\mathbf{u}) = \mathbf{C} : \boldsymbol{\varepsilon}(\mathbf{u})$ the stress tensor, in which $\boldsymbol{\varepsilon}(\mathbf{u})$ stands for the strain tensor and \mathbf{C} the 4th-order elasticity tensor (ρ and ω respectively denote the mass density and the time frequency).

- **Photonics:** in this case, electromagnetic propagation is described by the vector **Maxwell's equations**. For two-dimensional photonic crystals, these equations reduce to the following scalar equations respectively in the cases of TE (Transverse Electric) and TM (Transverse Magnetic) polarizations:

$$\begin{aligned} \text{TE case:} \quad Au &:= \Delta u + \omega^2 n^2 u \\ \text{TM case:} \quad Au &:= -\operatorname{div} \frac{1}{n^2} \nabla u + \omega^2 u \end{aligned} \quad (1.3)$$

where $n(x)$ denotes the index of refraction and ω the wavenumber.

Note that all the above operators involve an elliptic principal part. Moreover, the time dependence has been eliminated via a Fourier (or Laplace) transform, leading to the appearance of the real parameter ω (or the complex parameter p). Perfect periodic media are described via the operators (1.1), (1.2) or (1.3) –depending on the considered application– with periodic coefficients (potential, elasticity tensor and mass density or index, respectively for classical, phononic and photonic crystals).

The introduction of a defect in the periodic structure is taken into account by adding

a bounded obstacle or locally perturbing the coefficients. Typically, scattering by an impurity in a classical crystal (i.e. when the lattice contains a different atom at one of the lattice points), we have

$$V = V_{\text{per}} + V_0$$

where V_{per} is periodic and V_0 is a short range potential describing the local perturbation (see [34, p. 312]).

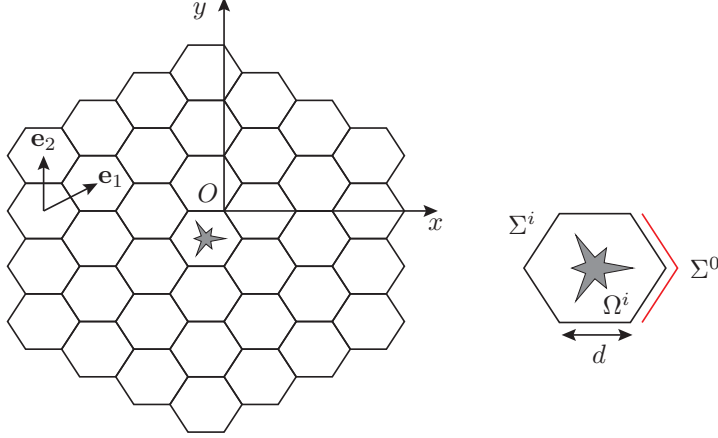


FIG. 1.2. *The hexagonal periodic medium with defect.*

In this paper, we will restrict our study, for the sake of simplicity, to the case of an infinite photonic crystal $\Omega = \mathbb{R}^2$ containing a localized defect in the hexagonal cell Ω^i (whose side length is denoted by d). We denote by $\Sigma^i = \partial\Omega^i$ the boundary of this cell and by $\Omega^e = \Omega \setminus \overline{\Omega^i}$ its exterior. From the mathematical point of view, the model problem we consider throughout the paper is a dissipative Helmholtz equation

$$\Delta u + \rho u = f, \quad \text{in } \Omega, \quad (1.4)$$

where the following assumptions will always be supposed to hold true

- **(A1)** ρ is a local perturbation of a hexagonal periodic function ρ_{per} . More precisely:

$$\rho = \rho_{\text{per}} + \rho_0$$

where

- for all $\mathbf{x} = (x, y) \in \Omega$ and all $(p, q) \in \mathbb{Z}^2$, $\rho_{\text{per}}(\mathbf{x} + p\mathbf{e}_1 + q\mathbf{e}_2) = \rho_{\text{per}}(\mathbf{x})$ with $\mathbf{e}_1 = (3d/2, \sqrt{3}d/2)$ and $\mathbf{e}_2 = (0, \sqrt{3}d)$ the two directions of periodicity of the media (see Figure 1.2);
- ρ_{per} and ρ_0 have hexagonal symmetry (see Definition 3.2);
- $\text{Supp}(\rho_0) \subset \Omega^i$.
- **(A2)** ρ satisfies the dissipation property

$$|\text{Im } \rho(\mathbf{x})| \geq \rho_b > 0, \quad \forall \mathbf{x} \in \Omega. \quad (1.5)$$

• **(A3)** The source f is compactly supported in Ω^i and has hexagonal symmetry. Before going further, let us make some comments about the above assumptions. In **(A2)**, condition (1.5) guarantees the existence and uniqueness of finite energy solutions of (1.4) (i.e. solutions in $H^1(\Omega)$) in the infinite domain Ω (as it can be easily checked by using Lax-Milgram Lemma). When no dissipation is assumed (i.e. when ρ is real-valued), such existence and uniqueness issues will not be discussed in this paper, nor will be the derivation of a limiting absorption principle. Let us emphasize that the latter remains, to our knowledge, an open question (see [19, Remark 2] and [25] for a similar discussion).

The main goal of this paper is to propose a method to solve (1.4) in the infinite domain Ω under assumptions **(A1)**-**(A2)**-**(A3)**. The main steps of our approach are presented in a formal way in the next Section.

2. Formal presentation of the method For the reader's convenience, we describe in this section the broad outlines of our approach in order to help the reader getting an overview of the proposed strategy. Willfully, we decided to focus on the description of the main steps of the method and to skip in this part all the technical details related to the functional framework.

Our approach is adapted from the one used in [17] for the case of square lattices. The key idea is to reduce problem (1.4), which is set in the unbounded domain Ω , to a boundary value problem set in the cell Ω^i containing the defect. To achieve this, we need to derive a suitable transparent boundary condition on Σ^i associated with a DtN operator Λ . More precisely, we note that the restriction $u^i := u|_{\Omega^i} \in H^1(\Omega^i)$ solves the interior boundary value problem

$$\begin{aligned} \Delta u^i + \rho u^i &= f, & \text{in } \Omega^i, \\ \frac{\partial u^i}{\partial \nu^i} + \Lambda u^i &= 0, & \text{on } \Sigma^i, \end{aligned}$$

where ν^i is the outgoing unit normal to Ω^i and Λ denotes the DtN operator defined by



$$\Lambda \phi = - \frac{\partial u^e(\phi)}{\partial \nu^i} \Big|_{\Sigma^i} \quad (2.1)$$

in which $u^e(\phi) \in H^1(\Omega^e)$ is the unique solution of the exterior problem

$$\begin{aligned} \Delta u^e(\phi) + \rho u^e(\phi) &= 0, & \text{in } \Omega^e, \\ u^e(\phi) &= \phi, & \text{on } \Sigma^i. \end{aligned} \quad (2.2)$$

The core of the paper is thus devoted to the computation of this DtN operator Λ . First of all, let us emphasize that due to the symmetry properties of the original problem ($2\pi/3$ rotational invariance, see Assumptions **(A1)** and **(A3)**), it suffices to compute this DtN operator Λ for Dirichlet data ϕ on Σ^i with hexagonal symmetry (See section 3 for more details). In this Section, we restrict our analysis from now on to such symmetric data.

In order to describe the different steps of our method, we need to introduce some

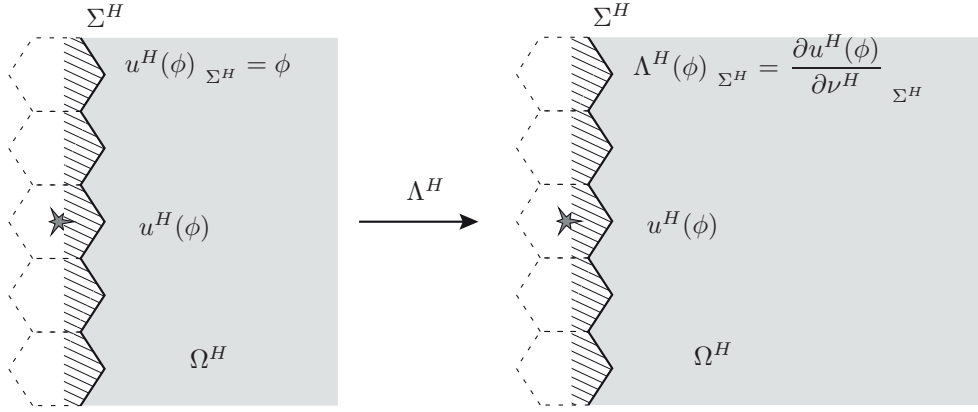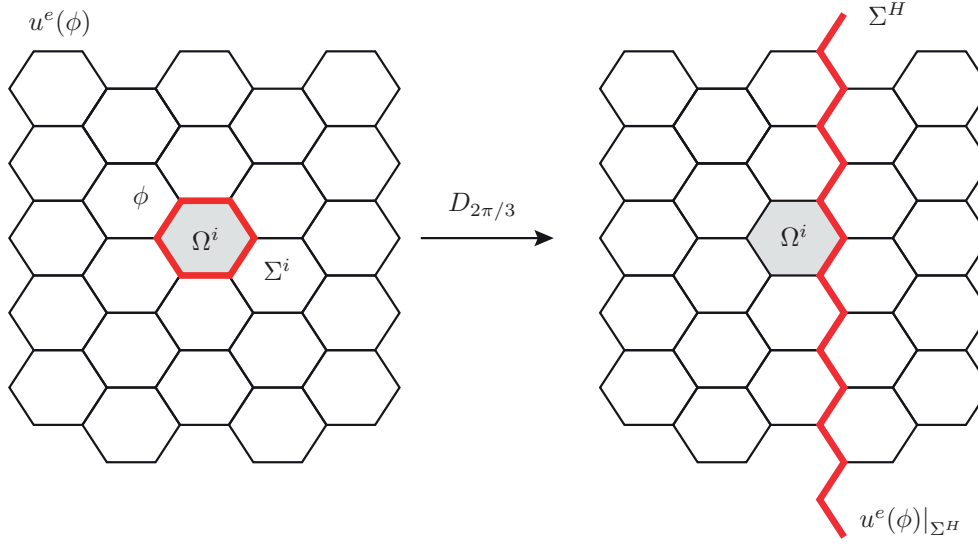FIG. 2.1. The half-space DtN operator Λ^H FIG. 2.2. The DtD operator $D_{2\pi/3}$

additional notation. Let Σ^H be the boundary depicted in Figure 2.1 and let Ω^H be the half-space to right of Σ^H . Given a Dirichlet data ϕ on Σ^H , we define the half-space DtN operator Λ^H by setting (see Figure 2.1)

$$\Lambda^H \phi = \frac{\partial u^H(\phi)}{\partial \nu^H} \Big|_{\Sigma^H} \quad (2.3)$$

where ν^H is the outgoing unit normal to Ω^H and $u^H(\phi)$ is the unique solution in $H^1(\Delta, \Omega^H)$ of the half-space problem

$$(\mathcal{P}^H) \quad \begin{aligned} \Delta u^H(\phi) + \rho u^H(\phi) &= 0, & \text{in } \Omega^H, \\ u^H(\phi) &= \phi, & \text{on } \Sigma^H. \end{aligned} \quad (2.4)$$

The second important ingredient needed is the DtD operator $D_{2\pi/3}$ defined from the boundary Σ^i to Σ^H (see Figure 2.2) by the formula:

$$D_{2\pi/3}\phi = u^e(\phi)|_{\Sigma^H} \quad (2.5)$$

where $u^e(\phi)$ is the unique solution of the exterior problem (2.2) for a given Dirichlet data ϕ on Σ^i .

Step 1 : Factorization of the DtN operator Λ . With the above notation, it is clear that given a Dirichlet data ϕ on Σ^i , the functions $u^e(\phi)$ and $u^H(D_{2\pi/3}\phi)$ are both solutions of the half-space homogeneous Helmholtz problem

$$\Delta U + \rho U = 0,$$

with the same Dirichlet condition on Σ^H , namely $D_{2\pi/3}\phi$. The uniqueness of the solution of this problem implies that

$$u^e(\phi)|_{\Omega^H} = u^H(D_{2\pi/3}\phi),$$

and in particular, the corresponding normal derivatives coincide on the part of the boundary $\Sigma^i \cap \Sigma^H$ where they are both defined, yielding

$$\Lambda\phi|_{\Sigma^i \cap \Sigma^H} = \Lambda^H D_{2\pi/3}\phi|_{\Sigma^i \cap \Sigma^H}, \quad (2.6)$$

the remaining part of $\Lambda\phi$ on Σ^i being recovered using hexagonal symmetry. The above relation constitutes the starting point of our strategy : the DtN operator Λ can be computed via the factorization formula (2.6). We provide in Theorem 4.1 a more precise statement of this *factorization result*, paying a particular attention to the functional framework. Thus, our problem is now reduced to the computation of the half-space DtN operator Λ^H and the DtD operator $D_{2\pi/3}$ for well prepared data (*i.e.* having $2\pi/3$ rotational invariance).

Step 2 : Characterization of the DtN operator Λ^H . In order to compute the half-space DtN operator Λ^H , the first key ingredient is the (partial) Floquet-Bloch transform in the vertical direction (see §.5.1). More precisely, applying it to the

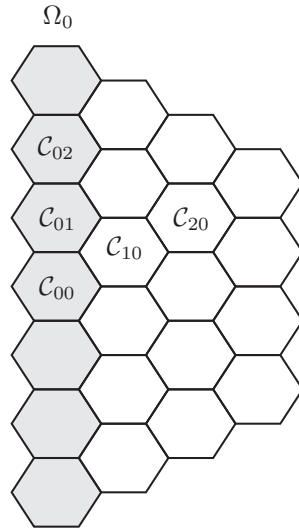


FIG. 2.3. Description of the half-space Ω^H and its periodicity cells

According to the above relation, solving the half-space problem amounts to determining the propagator \mathcal{P}_k and the values of $u^H(\phi)$ but only in the reference cell C_{00} . For the latter, by linearity, this can be achieved by solving two elementary cell problems set in C_{00} (see §.5.2.2). Regarding the determination of the propagator operator \mathcal{P}_k , we proceed as follows (see §.5.2.3). Writing the matching of the normal derivatives of the solution $u^H(\phi)$ across a suitable part of the interface Σ^H , we will show that \mathcal{P}_k solves a stationary Riccati equation.

Step 3 : Characterization of DtD operator $D_{2\pi/3}$. While the determination of the half-space DtN operator Λ^H described in Step 2 essentially uses the periodicity properties of the medium, the determination of the DtD operator $D_{2\pi/3}$ crucially uses its hexagonal symmetry. More precisely, we show in Theorem 6.1 that $D_{2\pi/3}$ solves an affine operator-valued equation (see equation (6.1) in Theorem 6.1) that is well-posed. In order to handle this equation from a practical point of view, we use once again

mathematical background related to geometries with hexagonal symmetry. Section 4 provides the factorization result (Theorem 4.1), which plays a key role in our method for computing the DtN operator Λ . The next two sections are devoted to the analysis of the two non local operators Λ^H and $D_{2\pi/3}$ involved in the factorization. More precisely, Section 5 deals with the half-space DtN operator Λ^H , while the DtD operator $D_{2\pi/3}$ is studied in Section 6. An algorithm will be given in conclusion to summarize this construction.

3. Hexagonal symmetry and related results

3.1. Definitions and functional framework

DEFINITION 3.1. *A domain \mathcal{O} of \mathbb{R}^2 has hexagonal symmetry if there exists a rotation of angle $2\pi/3$, denoted $\Theta_{2\pi/3}$ for which \mathcal{O} is invariant. In the above definition, the center of the rotation is not specified to simplify the notation. In the following, this center will always be the center of gravity of \mathcal{O} .*

REMARK 3.1. *If a domain \mathcal{O} of \mathbb{R}^2 has hexagonal symmetry, its boundary $\partial\mathcal{O}$ also has hexagonal symmetry.*

DEFINITION 3.2. *Let \mathcal{O} be an open set with hexagonal symmetry and let g be a real or complex valued function defined on \mathcal{O} . Then, g has hexagonal symmetry if*

$$g = g \circ \Theta_{2\pi/3}.$$

Let \mathcal{O} be an open domain with hexagonal symmetry (typically $\mathcal{O} = \Omega^e$, Ω^i and $\partial\mathcal{O} = \Sigma^i$). For $s \geq 0$, we denote by $H_{2\pi/3}^s(\mathcal{O})$ the closed subspace of $H^s(\mathcal{O})$ defined by

$$H_{2\pi/3}^s(\mathcal{O}) = \{v \in H^s(\mathcal{O}), v = v \circ \Theta_{2\pi/3}\}. \quad (3.1)$$

One can easily check that the restriction to $H_{2\pi/3}^1(\mathcal{O})$ of the trace operator γ_0 defined by

$$\forall u \in H^1(\mathcal{O}), \quad \gamma_0 u = u|_{\partial\mathcal{O}} \in H^{1/2}(\partial\mathcal{O}),$$

defines a continuous operator from $H_{2\pi/3}^1(\mathcal{O})$ onto $H_{2\pi/3}^{1/2}(\partial\mathcal{O})$.

Finally, let us define the appropriate functional space for the normal trace of a function with hexagonal symmetry. To achieve this, we introduce the spaces

$$H^1(\Delta, \mathcal{O}) = \{u \in H^1(\mathcal{O}) \mid \Delta u \in L^2(\mathcal{O})\}$$

and

$$H_{2\pi/3}^1(\Delta, \mathcal{O}) = \{u \in H_{2\pi/3}^1(\mathcal{O}) \mid \Delta u \in L_{2\pi/3}^2(\mathcal{O})\}.$$

The next result expresses in term of functional spaces the commutativity of the Laplace operator with the rotation $\Theta_{2\pi/3}$.

THEOREM 3.3. *Let \mathcal{O} be an open set of \mathbb{R}^2 with hexagonal symmetry. The Laplace operator commutes with any unitary transform and maps $H_{2\pi/3}^1(\Delta, \mathcal{O})$ onto $L_{2\pi/3}^2(\mathcal{O})$.*

We can now extend Definition (3.1) to the space $H^{-1/2}(\partial\mathcal{O})$ where \mathcal{O} is with hexagonal symmetry (typically $\mathcal{O} = \Omega^e$ or Ω^i and $\partial\mathcal{O} = \Sigma^i$)

DEFINITION 3.4. *Let \mathcal{O} be an open set of \mathbb{R}^2 with hexagonal symmetry. We define the closed subspace $H_{2\pi/3}^{-1/2}(\partial\mathcal{O})$ of $H^{-1/2}(\partial\mathcal{O})$ by*

$$H_{2\pi/3}^{-1/2}(\partial\mathcal{O}) = \gamma_1 u = \frac{\partial u}{\partial \nu} \Big|_{\partial\mathcal{O}}, u \in H_{2\pi/3}^1(\Delta, \mathcal{O})$$

where ν is the outgoing unit normal to \mathcal{O} .

Obviously, γ_1 is a continuous application from $H_{2\pi/3}^1(\Delta, \mathcal{O})$ onto $H_{2\pi/3}^{-1/2}(\partial\mathcal{O})$.

3.2. Restriction and extension operators Let R be the restriction operator defined by

$$\begin{aligned} R : L^2(\Sigma^i) &\rightarrow L^2(\Sigma^0) \\ \phi &\mapsto \phi|_{\Sigma^0} \end{aligned}$$

where Σ^0 is the right part of Σ^i (see Figure 1.2). One can easily check that R defines an isomorphism from the subspace $L_{2\pi/3}^2(\Sigma^i) := \{v \in L^2(\Sigma^i), v = v \circ \Theta_{2\pi/3}\}$ onto $L^2(\Sigma^0)$ that we shall denote by $R_{2\pi/3}$. Its inverse $E_{2\pi/3}$ is an extension operator which can be given explicitly thanks to the rotation $\Theta_{2\pi/3}$:

$$\forall \phi \in L^2(\Sigma^0), \quad \begin{cases} E_{2\pi/3}\phi|_{\Sigma^0} = \phi \\ E_{2\pi/3}\phi|_{\Theta_{2\pi/3}\Sigma^0} = \phi \circ \Theta_{-2\pi/3} \\ E_{2\pi/3}\phi|_{\Theta_{2\pi/3}^2\Sigma^0} = \phi \circ \Theta_{-2\pi/3}^2 \end{cases}$$

We define the following space

$$\begin{aligned} H_{2\pi/3}^{1/2}(\Sigma^0) &:= R_{2\pi/3}\phi, \phi \in H_{2\pi/3}^{1/2}(\Sigma^i) \quad , \\ &= \phi \in H^{1/2}(\Sigma^0), E_{2\pi/3}\phi \in H_{2\pi/3}^{1/2}(\Sigma^i) \quad . \end{aligned}$$

This space is nothing but the space of functions in $H^{1/2}(\Sigma^0)$ which are periodic.

We now explain how to extend the restriction operator $R_{2\pi/3}$ to $H_{2\pi/3}^{-1/2}(\Sigma^i)$ (see Definition 3.4). This can be done by duality, noticing that we have

$$\forall \phi \in L_{2\pi/3}^2(\Sigma^i), \forall \psi \in L^2(\Sigma^0), \quad R_{2\pi/3}\phi, \psi|_{\Sigma^0} = \frac{1}{3} \langle \phi, E_{2\pi/3}\psi \rangle_{\Sigma^i},$$

where $(\cdot, \cdot)_{\Sigma^0}$ (resp. $(\cdot, \cdot)_{\Sigma^i}$) is the scalar product in $L^2(\Sigma^0)$ (resp. $L^2(\Sigma^i)$). This last relation suggests an extension of $R_{2\pi/3}$ to $H_{2\pi/3}^{-1/2}(\Sigma^i)$ by

$$\forall \phi \in H_{2\pi/3}^{-1/2}(\Sigma^i), \forall \psi \in H_{2\pi/3}^{1/2}(\Sigma^0), \quad \langle R_{2\pi/3}\phi, \psi \rangle_{\Sigma^0} = \frac{1}{3} \langle \phi, E_{2\pi/3}\psi \rangle_{\Sigma^i},$$

where $\langle \cdot, \cdot \rangle_{\Sigma^0}$ (resp. $\langle \cdot, \cdot \rangle_{\Sigma^i}$) is the duality product between the two spaces $[H_{2\pi/3}^{1/2}(\Sigma^0)]'$ and $H_{2\pi/3}^{1/2}(\Sigma^0)$ (resp. $H_{2\pi/3}^{-1/2}(\Sigma^i)$ and $H_{2\pi/3}^{1/2}(\Sigma^i)$). We introduce the closed subspace of $H_{2\pi/3}^{1/2}(\Sigma^0)'$:

$$H_{2\pi/3}^{-1/2}(\Sigma^0) := R_{2\pi/3} H_{2\pi/3}^{-1/2}(\Sigma^i) \quad ,$$

and conclude that $R_{2\pi/3}$ is a linear continuous map from $H_{2\pi/3}^{-1/2}(\Sigma^i)$ onto $H_{2\pi/3}^{-1/2}(\Sigma^0)$.

Analogously, $E_{2\pi/3}$ can be extended to a linear continuous mapping from $H_{2\pi/3}^{-1/2}(\Sigma^0)$ onto $H_{2\pi/3}^{-1/2}(\Sigma^i)$ using:

$$\forall \psi \in H_{2\pi/3}^{-1/2}(\Sigma^0), \forall \phi \in H_{2\pi/3}^{1/2}(\Sigma^i), \quad \langle E_{2\pi/3}\psi, \phi \rangle_{\Sigma^i} = 3 \langle \psi, R_{2\pi/3}\phi \rangle_{\Sigma^0}.$$

3.3. Symmetry properties for the exterior problem Using the definitions and properties of media and functions with hexagonal symmetries and considering assumptions (A1) and (A2), one can show the following theorem:

THEOREM 3.5. *If $\phi \in H_{2\pi/3}^{1/2}(\Sigma^i)$, then the unique solution $u^e(\phi)$ of (2.2) belongs to $H_{2\pi/3}^1(\Delta, \Omega^e)$ and $\Lambda\phi \in H_{2\pi/3}^{-1/2}(\Sigma^i)$, where Λ is the DtN operator defined in (2.1).*

Proof. It suffices to prove that $u^e(\Theta_{2\pi/3}\phi)$ is also a solution of (2.2) and then conclude using a uniqueness argument. The last implication follows immediately from the definition of the normal trace operator. \square

A consequence of Theorem 3.5 is that Λ maps continuously $H_{2\pi/3}^1(\Sigma^i)$ onto $H_{2\pi/3}^{-1/2}(\Sigma^i)$, leading to the natural definition of the DtN operator

$$\Lambda_{2\pi/3} := \Lambda|_{H_{2\pi/3}^{1/2}(\Sigma^i)} \in \mathcal{L}(H_{2\pi/3}^{1/2}(\Sigma^i), H_{2\pi/3}^{-1/2}(\Sigma^i)). \quad (3.2)$$

Finally, taking into account the assumptions (A1)-(A3) concerning the hexagonal symmetry of the local perturbation ρ_0 and of the source term f , and using uniqueness argument, we deduce that

THEOREM 3.6. *Let u be the unique solution of (1.4). Then the restriction $u^i = u|_{\Omega^i}$ of u is the unique solution of the interior boundary value problem*

$$\begin{aligned} \Delta u^i + \rho u^i &= f, & \text{in } \Omega^i, \\ \frac{\partial u^i}{\partial \nu^i} + \Lambda_{2\pi/3} u^i &= 0, & \text{on } \Sigma^i. \end{aligned}$$

The rest of the paper is devoted to the determination of the DtN operator $\Lambda_{2\pi/3}$.

4. Factorization of the DtN operator

First of all let us recall some useful notation. Let Σ^H be the boundary depicted in Figure 2.1 and let Ω^H be the half-space to right of Σ^H .

Let $\Lambda^H \in \mathcal{L}(H^{1/2}(\Sigma^H), H^{-1/2}(\Sigma^H))$ be the half-space DtN operator (see Figure 2.1)

$$\Lambda^H \phi = \frac{\partial u^H(\phi)}{\partial \nu^H} \Big|_{\Sigma^H} \quad (4.1)$$

where ν^H is the exterior normal to Ω^H and $u^H(\phi)$ is the unique solution in $H^1(\Delta, \Omega^H)$ of the half-space problem

$$(\mathcal{P}^H) \quad \begin{aligned} \Delta u^H(\phi) + \rho u^H(\phi) &= 0, & \text{in } \Omega^H, \\ u^H(\phi) &= \phi, & \text{on } \Sigma^H. \end{aligned} \quad (4.2)$$

Let $D_{2\pi/3} \in \mathcal{L}(H^{1/2}(\Sigma^i), H^{1/2}(\Sigma^H))$ be the DtD operator defined by (see Figure 2.2):

$$D_{2\pi/3} \phi = u^e(\phi)|_{\Sigma^H} \quad (4.3)$$

where $u^e(\phi)$ is the unique solution of (2.2).

Moreover, we need to introduce a restriction operator R^H from Σ^H to Σ^0 . As we need to apply this operator to functions of $H^{-1/2}(\Sigma^H)$, R^H has to be defined in a weak sense. We denote by $E^H \in \mathcal{L}(L^2(\Sigma^0), L^2(\Sigma^H))$ the extension operator by zero from Σ^0 to Σ^H :

$$E^H \phi = \begin{cases} \phi & \text{on } \Sigma^0, \\ 0 & \text{on } \Sigma^H \setminus \Sigma^0. \end{cases}$$

Let $H_{00}^{1/2}(\Sigma^0)$ be the subspace of $H^{1/2}(\Sigma^0)$ defined by:

$$H_{00}^{1/2}(\Sigma^0) = \{\phi \in H^{1/2}(\Sigma^0) \mid E^H \phi \in H^{1/2}(\Sigma^H)\},$$

and let $H^{-1/2}(\Sigma^0) = H_{00}^{1/2}(\Sigma^0)'$ be its dual space. The restriction operator $R^H \in \mathcal{L}(H^{-1/2}(\Sigma^H), H^{-1/2}(\Sigma^0))$ can then be defined by duality

$$\begin{aligned} \langle R^H \phi, \psi \rangle_{\tilde{H}^{-1/2}(\Sigma^0), H_{0,0}^{1/2}(\Sigma^0)} &= \langle \phi, E^H \psi \rangle_{H^{-1/2}(\Sigma^H), H^{1/2}(\Sigma^H)}, \\ \forall (\phi, \psi) &\in H^{-1/2}(\Sigma^H) \times H_{00}^{1/2}(\Sigma^0). \end{aligned} \quad (4.4)$$

The main result of this section reads as follows.

THEOREM 4.1. *The operator $R^H \circ \Lambda^H \circ D_{2\pi/3}$ maps $H_{2\pi/3}^{1/2}(\Sigma^i)$ into $H_{2\pi/3}^{-1/2}(\Sigma_0)$ and $\Lambda_{2\pi/3} \in \mathcal{L}(H_{2\pi/3}^{1/2}(\Sigma^i), H_{2\pi/3}^{-1/2}(\Sigma^i))$ defined by (3.2) admits the factorization*

$$\forall \phi \in H_{2\pi/3}^{1/2}(\Sigma^i), \quad \Lambda_{2\pi/3} \phi = E_{2\pi/3} \circ R^H \circ \Lambda^H \circ D_{2\pi/3} \phi$$

where

- $D_{2\pi/3} \in \mathcal{L}(H^{1/2}(\Sigma^i), H^{1/2}(\Sigma^H))$ is the DtD operator defined by (4.3),
- $\Lambda^H \in \mathcal{L}(H^{1/2}(\Sigma^H), H^{-1/2}(\Sigma^H))$ is the half-space DtN operator defined by (4.1),
- $R^H \in \mathcal{L}(H^{-1/2}(\Sigma^H), H^{-1/2}(\Sigma^0))$ is the restriction operator defined by (4.4),
- $E_{2\pi/3} \in \mathcal{L}(H_{2\pi/3}^{-1/2}(\Sigma_0), H_{2\pi/3}^{-1/2}(\Sigma^i))$ is the extension operator by symmetry defined in Section 3.2.

Proof. Let $\phi \in H_{2\pi/3}^{1/2}(\Sigma^i)$. From the definition of $D_{2\pi/3}$, the functions $u^e(\phi)|_{\Omega^H}$ and $u^H(D_{2\pi/3}\phi)$ satisfy the half-space Helmholtz problem (4.2) with the same Dirichlet condition on Σ^H , namely $\psi = D_{2\pi/3}\phi$. The uniqueness of the solution of this problem implies that $u^e(\phi)|_{\Omega^H} = u^H(D_{2\pi/3}\phi)$ and in particular, the traces of their normal derivatives on Σ^0 coincide, yielding

$$R_{2\pi/3} - \frac{\partial u^e(\phi)}{\partial \nu^i} \Big|_{\Sigma^i} = (R^H \circ \Lambda^H \circ D_{2\pi/3})\phi.$$

where $R_{2\pi/3}$ is the restriction operator by symmetry defined in Section 3.2. This relation proves the first part of the theorem. For the second part, we just use that $E_{2\pi/3}$ is the inverse of $R_{2\pi/3}$. \square

In section 5, we explain how to compute the half-space DtN operator with the help of an adapted version of the Floquet-Bloch transform defined in 5.1.1 and the resolution of a family of half-space problems (4.2) with k -quasiperiodic boundary conditions. Section 6 deals with the characterization of the DtD operator $D_{2\pi/3}$. The computation of $D_{2\pi/3}$ *a priori* requires to compute the solutions u^e of the exterior problem (2.2) defined in an unbounded domain. We explain, using the half-space problem and the properties of the problem, how to obtain a characterization of this operator which avoid the solution of the exterior problem.

5. Characterization of the half-space DtN operator In this section, we tackle the Dirichlet half-space problem. In other words, for any $\phi \in H^{1/2}(\Sigma^H)$ we want to compute the solution $u^H(\phi)$ in $H^1(\Delta, \Omega^H)$ of

$$(\mathcal{P}^H) \quad \begin{aligned} \Delta u^H(\phi) + \rho u^H(\phi) &= 0, & \text{in } \Omega^H, \\ u^H(\phi) &= \phi, & \text{on } \Sigma^H, \end{aligned}$$

(see Figure 2.1 for notations). We will deduce a characterization of the half-space DtN operator Λ^H

$$\Lambda^H \phi = \frac{\partial u^H(\phi)}{\partial \nu^H} \Big|_{\Sigma^H}$$

where ν^H is the exterior normal to Ω^H .

REMARK 5.1. *The half-space problem is not only interesting as a step of our approach to analyze transparent boundary conditions for locally perturbed hexagonal periodic media. Indeed, it also appears naturally in transmission problems between a homogeneous medium and a hexagonal periodic one (see [5] where such problems are considered for the case of one dimensional type periodic media and [18] for the case of square lattices.)*

We develop a method for computing the solution of (4.2) and the operator Λ^H , by adapting the method developed in [17, 19]. In these works, the half-space solution and then the half-space DtN operator are computed using the Floquet Bloch transform. More precisely, this is done via the resolution of a family of waveguide problems with quasiperiodic conditions, each waveguide solution being computed thanks to the resolution of elementary cell problems and a stationary Riccati equation. In our case, this approach cannot be directly transposed since

- the waveguide boundary would not correspond to a physical boundary (see the shaded domain of Figure 5.1);
- but most importantly, computing $D_{2\pi/3}$ would be much more intricate (see Remark 6.4).

Instead, the half-space problem is handled by solving a family of half-space problems with k -quasiperiodic boundary conditions.

5.1. The half-space problem: from arbitrary data to quasiperiodic data

5.1.1. The Floquet-Bloch (FB) transform and its properties Following [17, 28], we recall below the definition of the FB transform and state without proof its main properties.

Set $\mathbb{K} = \mathbb{R} \times (-\pi/L, \pi/L)$. The FB transform of period L (here $L = \sqrt{3}d$) is defined by

$$\begin{aligned} \mathcal{F} : \mathcal{C}_0^\infty(\mathbb{R}) &\rightarrow L_{\text{QP}}^2(\mathbb{K}) \\ \phi(y) &\mapsto \mathcal{F}\phi(y; k) = \overline{\frac{L}{2\pi}} \sum_{q \in \mathbb{Z}} \phi(y + qL) e^{-iqkL}. \end{aligned}$$

where $L_{\text{QP}}^2(\mathbb{K})$ is the set of functions $\hat{f} \in L_{\text{loc}}^2$ such that for any $k \in (-\pi/L, \pi/L)$, $\hat{f}(\cdot, k)$ is k -quasi-periodic, that means $\hat{f}(y + nL, k) = \hat{f}(y, k) e^{in k L}$. We equip this space by the norm of $L^2(\mathbb{K}_0)$ where $\mathbb{K}_0 = (-L/2, L/2) \times (-\pi/L, \pi/L)$.

The operator \mathcal{F} can be extended as an isometry between $L^2(\mathbb{R})$ and $L_{\text{QP}}^2(\mathbb{K})$:

$$\forall \phi, \psi \in L^2(\mathbb{R}), \quad \langle \mathcal{F}\phi, \mathcal{F}\psi \rangle_{L_{\text{QP}}^2(\mathbb{K})} = \langle \phi, \psi \rangle_{L^2(\mathbb{R})}.$$

This transform is a privileged tool for the study of PDE with periodic coefficients because it commutes with

- any differential operator ;
- the multiplication by any periodic function with period L .

The FB transform is invertible and the inversion formula is given by

$$\forall y \in \mathbb{R}, \quad \phi(y) = \frac{1}{2\pi} \int_{-\pi/L}^{\pi/L} \mathcal{F}\phi(y; k) dk. \quad (5.1)$$

Next we define the partial FB transform in the y -direction in the half-space Ω^H :

$$\begin{aligned} \mathcal{F}_y : L^2(\Omega^H) &\rightarrow L^2_{\text{QP}}(\Omega^H) \times \left[-\frac{\pi}{L}, \frac{\pi}{L}\right] \\ u(x, y) &\mapsto \mathcal{F}_y u(x, y; k) \end{aligned}$$

with

$$\forall x, \quad (\mathcal{F}_y u)(x, \cdot; \cdot) = \mathcal{F}[u(x, \cdot)],$$

and $L^2_{\text{QP}}(\Omega^H) \times (-\pi/L, \pi/L)$ is the set of square integrable functions \hat{f} , locally in the y -direction, such that for any $k \in (-\pi/L, \pi/L)$, $\hat{f}(\cdot, k)$ is k -quasi-periodic in the y -direction, that means $\hat{f}(\cdot, y + nL, k) = \hat{f}(\cdot, y, k)e^{in k L}$. We equip this space by the norm of $L^2(\Omega^W) \times (-\pi/L, \pi/L)$ where $\Omega^W = \Omega^H \cap \{y \in (-L/2, L/2)\}$ (see Figure 5.1).

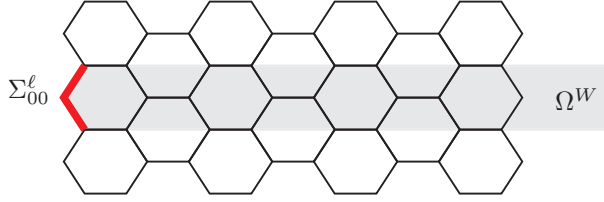


FIG. 5.1. The domain Ω^W and its left boundary Σ_{00}^l .

It is easy to see that the partial FB transform \mathcal{F}_y defines an isomorphism from $L^2(\Omega^H)$ into $L^2_{\text{QP}}(\Omega^H) \times (-\pi/L, \pi/L)$.

Now we want to know how the Floquet Bloch transform is defined or can be extended to the other functional spaces appearing in our study ($H^1(\Omega^H, \Delta)$, $H^{1/2}(\Sigma^H)$ and $H^{-1/2}(\Sigma^H)$). To make a rigorous presentation, we need to introduce, k being a parameter between $-\pi/L$ and π/L , the so called k -quasiperiodic extension operator $E_k^{\text{QP}} \in \mathcal{L}(L^2(\Omega^W), L^2_{\text{unif}}(\Omega^H))$ defined by

$$\forall u \in L^2(\Omega^W), \forall q \in \mathbb{Z}, \forall (x, y) \in \Omega^W, \quad E_k^{\text{QP}} u(x, y + qL) = u(x, y) e^{iqkL},$$

where $L^2_{\text{unif}}(\Omega^H)$ is the normed space defined by

$$L^2_{\text{unif}}(\Omega^H) := \left\{ u \in L^2_{\text{loc}}(\Omega^H), \sup_{q \in \mathbb{Z}} \sup_{\Omega^W + qe_2} |u|^2 < +\infty \right\}.$$

A natural functional space which appears is the set of locally L^2 , k -quasiperiodic functions defined in Ω^H , denoted $L_k^2(\Omega^H)$ and characterized by

$$L_k^2(\Omega^H) = E_k^{QP} L^2(\Omega^W) .$$

We can introduce the corresponding k -quasiperiodic restriction operator

$$R_k^{QP} \in \mathcal{L} L_k^2(\Omega^H), L^2(\Omega^W)$$

defined by

$$\forall u_k \in L_k^2(\Omega^H), \quad R_k^{QP} u_k := u_k|_{\Omega^W} .$$

Noting that

$$L^2(\Omega^W) = R_k^{QP} L_k^2(\Omega^H) ,$$

it is easy to see that $L_k^2(\Omega^H)$ and $L^2(\Omega^W)$ are isomorphic. We can then consider $L_k^2(\Omega^H)$ as a Hilbert space when it is endowed with the inner product of $L^2(\Omega^W)$. More precisely, we define the scalar product on $L_k^2(\Omega^H)$ as follows

$$\forall (u_k, v_k) \in L_k^2(\Omega^H)^2, \quad (u_k, v_k)_{L_k^2(\Omega^H)} = R_k^{QP} u_k, R_k^{QP} v_k_{L^2(\Omega^W)} .$$

Next we define smooth quasiperiodic functions in Ω^H

$$\mathcal{C}_k^\infty(\Omega^H) = \{ u \in C^\infty(\Omega^H), \quad u(x, y + L) = u(x, y) e^{ikL}, \quad \forall (x, y) \in \Omega^H \} .$$

and smooth quasiperiodic functions in Ω^W

$$\mathcal{C}_k^\infty(\Omega^W) = R_k^{QP} \mathcal{C}_k^\infty(\Omega^H)$$

Let $H_k^1(\Omega^W)$ (resp. $H_k^1(\Delta, \Omega^W)$) be the closure of $\mathcal{C}_k^\infty(\Omega^W)$ in $H^1(\Omega^W)$ (resp. in $H^1(\Delta, \Omega^W)$) equipped with the norm of $H^1(\Omega^W)$ (resp. the norm of $H^1(\Delta, \Omega^W)$) and let $H_k^1(\Omega^H)$ (resp. $H_k^1(\Delta, \Omega^H)$) be defined by

$$H_k^1(\Omega^H) = E_k^{QP} H_k^1(\Omega^W) \quad \text{resp.} \quad H_k^1(\Delta, \Omega^H) = E_k^{QP} H_k^1(\Delta, \Omega^W) ,$$

that we also equip with the norm of $H^1(\Omega^W)$ (resp. the norm of $H^1(\Delta, \Omega^W)$).

REMARK 5.2. *The functions of $H_k^1(\Omega^H)$ are nothing but the k -quasiperiodic extensions of functions in $H_k^1(\Omega^W)$. Therefore they are H^1 in any horizontal strip but not in the vertical ones.*

Let us denote (see Figure 5.1)

$$\Sigma_{00}^\ell := \Sigma^H \cap \overline{\Omega^W} \quad \neq \Sigma^0 .$$

and let us define $H_k^{1/2}(\Sigma_{00}^\ell)$ by

$$H_k^{1/2}(\Sigma_{00}^\ell) := \{ u|_{\Sigma_{00}^\ell}, \quad u \in H_k^1(\Omega^W) \} ,$$

equipped with the graph norm. We define the space $H_k^{1/2}(\Sigma^H)$ by k -quasiperiodic extension of functions of $H_k^{1/2}(\Sigma_{00}^\ell)$:

$$H_k^{1/2}(\Sigma^H) = E_k^{QP} H_k^{1/2}(\Sigma_{00}^\ell) ,$$

that we equip with the norm of $H_k^{1/2}(\Sigma_{00}^\ell)$.

The space $H_k^{1/2}(\Sigma_{00}^\ell)$ is a dense subspace of $H^{1/2}(\Sigma_{00}^\ell)$ and the embedding from $H_k^{1/2}(\Sigma_{00}^\ell)$ onto $H^{1/2}(\Sigma_{00}^\ell)$ is continuous. We can then define the dual space of $H_k^{1/2}(\Sigma_{00}^\ell)$ that we call $H_k^{-1/2}(\Sigma_{00}^\ell)$. According to Green's formula, we can show that

$$H_k^{-1/2}(\Sigma_{00}^\ell) = -\frac{\partial u}{\partial \nu} \Big|_{\Sigma_{00}^\ell}, \quad u \in H_k^1(\Delta, \Omega^W) \quad .$$

To define the space of k -extension of functions in $H_k^{-1/2}(\Sigma_{00}^\ell)$, we need to define the extension operator E_k^{QP} on $H_k^{-1/2}(\Sigma_{00}^\ell)$ in a weak sense. Actually, this can be done by duality by setting for all $(\psi_0, \phi_k) \in H_k^{-1/2}(\Sigma_{00}^\ell) \times H_k^{1/2}(\Sigma^H)$

$$\langle E_k^{QP} \psi_0, \phi_k \rangle_{(H_k^{1/2}(\Sigma^H))', H_k^{1/2}(\Sigma^H)} = \langle \psi_0, R_k^{QP} \phi_k \rangle_{H_k^{-1/2}(\Sigma_{00}^\ell), H_k^{1/2}(\Sigma_{00}^\ell)}.$$

Finally, we define $H_k^{-1/2}(\Sigma^H) = E_k^{QP} H_k^{-1/2}(\Sigma_{00}^\ell) \quad .$

We can now state the following results.

THEOREM 5.1. \mathcal{F}_y is an isomorphism from X^H onto

$$X_{QP} := \quad u \in L^2 \quad -\pi/L, \pi/L; X^H \quad | \quad \text{for a. e. } k \in (-\pi/L, \pi/L), u(\cdot; k) \in X_k^H \quad ,$$

equipped with the norm $\|u\|_{\mathcal{F}_{QP}}^2 = \int_{-\pi/L}^{\pi/L} \|u(\cdot; k)\|_{X_k^H}^2 dk$ where

- $X^H = H^1(\Omega^H)$, $X_{QP} = H_{QP}^1 \Omega^H \times (-\pi/L, \pi/L)$ and $X_k^H = H_k^1(\Omega^H)$;
- $X^H = H^1(\Delta, \Omega^H)$, $X_{QP} = H_{QP}^1 \Delta; \Omega^H \times (-\pi/L, \pi/L)$ and $X_k^H = H_k^1(\Delta, \Omega^H)$;
- $X^H = H^{1/2}(\Sigma^H)$, $X_{QP} = H_{QP}^{1/2} \Sigma^H \times (-\pi/L, \pi/L)$ and $X_k^H = H_k^{1/2}(\Sigma^H)$.

Finally, we can extend by duality the definition of \mathcal{F}_y to the space $H^{-1/2}(\Sigma^H)$ introducing the dual of $H_{QP}^{1/2} \Sigma^H \times (-\pi/L, \pi/L)$

$$H_{QP}^{-1/2} \Sigma^H \times (-\pi/L, \pi/L) :=$$

$$\psi \in L^2 \quad (-\pi/L, \pi/L; X) \quad | \quad \forall k \in (-\pi/L, \pi/L), \psi(\cdot; k) \in H_k^{-1/2}(\Sigma^H) \quad ,$$

where $X = E_0^{QP} H_{00}^{1/2}(\Sigma_{00}^\ell) \quad ' \quad .$

According to Theorem 5.1, the partial FB transform \mathcal{F}_y defines an isomorphism from $H^{1/2}(\Sigma^H)$ onto $H_{QP}^{1/2} \Sigma^H \times (-\pi/L, \pi/L)$. Using the Riesz representation theorem, the FB transform can then be extended by duality as an isomorphism from $H^{-1/2}(\Sigma^H)$ onto $H_{QP}^{-1/2} \Sigma^H \times (-\pi/L, \pi/L)$ see [19] for more details.

5.1.2. Application to the half-space problem The above results imply that for almost every k in $(-\pi/L, \pi/L)$, we have

$$\left| \begin{array}{l} \forall \phi \in H^{1/2}(\Sigma^H), \phi_k := \mathcal{F}_y \phi(\cdot; k) \in H_k^{1/2}(\Sigma^H) \\ \forall \psi \in H^{-1/2}(\Sigma^H), \psi_k := \mathcal{F}_y \psi(\cdot; k) \in H_k^{-1/2}(\Sigma^H) \\ \forall u^H \in H^1(\Delta, \Omega^H), u_k^H := \mathcal{F}_y u^H(\cdot; k) \in H_k^1(\Delta, \Omega^H) \end{array} \right.$$

The following theorem is a direct consequence of the properties of the FB transform given in the previous section.

THEOREM 5.2. *Let $u^H(\phi)$ be the solution of problem (\mathcal{P}^H) (see equation (4.2)). For every $k \in (-\pi/L, \pi/L)$, $u_k^H \phi_k := \mathcal{F}_y u^H(\phi)(\cdot; k)$ is the unique solution $H_k^1(\Delta, \Omega^H)$ of the half-space problem with the k -quasiperiodic boundary condition $\phi_k = \mathcal{F}_y \phi(\cdot; k)$. Using the inversion formula (5.1), we can recover $u^H(\phi)$ in the whole domain Ω^H for any Dirichlet condition $\phi \in H^{1/2}(\Sigma^H)$:*

$$u^H(\phi) = \overline{\frac{L}{2\pi}} \int_{-\pi/L}^{\pi/L} u_k^H \phi_k dk. \quad (5.2)$$

Then we can show the following theorem which expresses that the half-space DtN operator Λ^H can be described in terms of a family of “quasiperiodic” half-space DtN operators.

THEOREM 5.3. *The half-space DtN operator Λ^H is given by:*

$$\forall \phi \in H^{1/2}(\Sigma^H), \quad \Lambda^H \phi = \overline{\frac{L}{2\pi}} \int_{-\pi/L}^{\pi/L} \Lambda_k^H \phi_k dk, \quad (5.3)$$

where Λ_k^H is k -quasiperiodic half-space DtN operator, defined by

$$\Lambda_k^H \phi_k = \frac{\partial u_k^H \phi_k}{\partial \nu^H} \Big|_{\Sigma^H} \quad (5.4)$$

According to relations (5.2) (resp. (5.3)), the solution of the half-space problem (resp. the half-space DtN operator) for arbitrary boundary data ϕ is obtained by superposing the corresponding solutions (resp. DtN operator) for quasiperiodic data. The next subsection is devoted to solving such problems.

5.2. Solution of the half-space problem for quasiperiodic boundary data

Let k be in $(-\pi/L, \pi/L)$, we explain here how to compute the solution of (\mathcal{P}^H) (see (4.2)) for k -quasiperiodic boundary data $\phi := \phi_k \in H_k^{1/2}(\Sigma^H)$. We have seen in the previous sections (see in particular Theorems 5.2 and 5.3) that for any $\phi_k \in H_k^{1/2}(\Sigma^H)$, (4.2) admits a unique solution $u_k^H(\phi_k) \in H_k^1(\Delta, \Omega^H)$ and $\Lambda_k^H \phi_k \in H_k^{-1/2}(\Sigma^H)$.

This half-space problem is in some sense the counterpart of the waveguide problem with k -quasiperiodic conditions used in [17, 19] to determine the half-space DtN operator for the case of a square periodicity cell. In [17, 19], the basic tools are the resolution of elementary cell problems and a stationary Riccati equation whose solution is a so-called propagation operator.

Let us begin with some notation. Let \mathcal{C}_{00} be a periodicity cell whose boundary meets the vertical boundary Σ^H . Given $p \in \mathbb{N}$, $q \in \mathbb{Z}$, we introduce the vector $\mathbf{V}_{pq} = p\mathbf{e}_1 + q\mathbf{e}_2$ (See Assumption (A1) in Section 1 and Figure 1.2 for the definition of the directions of periodicity \mathbf{e}_1 and \mathbf{e}_2). The cell \mathcal{C}_{pq} of the periodic half-space can then be defined by translation of the reference cell (see Figure 2.3)

$$\forall p \in \mathbb{N}, q \in \mathbb{Z}, \quad \mathcal{C}_{pq} = \mathcal{C}_{00} + \mathbf{V}_{pq}.$$

We will denote by Ω_p the vertical “strip” containing the cell \mathcal{C}_{p0} :

$$\Omega_p = \bigcup_{q \in \mathbb{Z}} \mathcal{C}_{pq}.$$

In the following, for a cell of periodicity \mathcal{C}_{pq} , we introduce the oriented boundaries described in Figure 5.2.

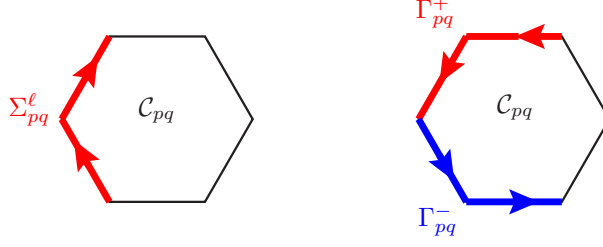


FIG. 5.2. Notations used for a periodicity cell

Finally, using the k -quasiperiodic restriction operator R_k^{QP} and the k -quasiperiodic extension operator E_k^{QP} defined in Section 5.1.1, we recall that $H_k^{1/2}(\Sigma^H)$ is isomorphic to $H_k^{1/2}(\Sigma_{00}^\ell)$.

5.2.1. The propagation operator We can now introduce the operator \mathcal{P}_k defined by

$$\forall \phi_k^0 \in H_k^{1/2}(\Sigma_{00}^\ell), \quad \mathcal{P}_k \phi_k^0 = u_k^H(E_k^{QP} \phi_k^0)_{\Sigma_{10}^\ell}$$

where $u_k^H(E_k^{QP} \phi_k^0)$ is the unique solution of (\mathcal{P}^H) (see (4.2)) with boundary condition the k -quasiperiodic extension of ϕ_k^0 : $E_k^{QP} \phi_k^0$.




FIG. 5.3. Description of the propagation operator

REMARK 5.3. For the sake of simplicity, we will often identify throughout the paper functional spaces of functions acting on Σ_{pq}^ℓ , with the same spaces acting on Σ_{00}^ℓ . Typically, $H_k^{1/2}(\Sigma_{pq}^\ell)$ for arbitrary $(p, q) \in \mathbb{N} \times \mathbb{Z}$ will be identified with $H_k^{1/2}(\Sigma_{00}^\ell)$.

The operator \mathcal{P}_k , considered now as a bounded linear operator from $H_k^{1/2}(\Sigma_{00}^\ell)$ onto itself (see Remark 5.3), is called a “propagation operator”. Indeed, the solution can be reconstructed in any cell of the medium from its values in the reference cell \mathcal{C}_{00} and the knowledge of \mathcal{P}_k , as shown in the next result.

THEOREM 5.4. For any k -quasiperiodic condition $\phi_k \in H_k^{1/2}(\Sigma^H)$, the solution $u_k^H(\phi_k)$ of (4.2) is given by

$$\forall p \in \mathbb{N}, q \in \mathbb{Z}, \quad u_k^H(\phi_k)_{\mathcal{C}_{pq}} = e^{iqkL} u_k^H(E_k^{QP} \mathcal{P}_k^p R_k^{QP} \phi_k)_{\mathcal{C}_{00}}. \quad (5.5)$$

Proof. First of all, it is clear that the periodicity and the well-posedness of the problem in the vertical direction implies that for any $q \in \mathbb{Z}$, we have

$$u_k^H(\phi_k)_{\mathcal{C}_{0q}} = e^{iqkL} u_k^H(\phi_k)_{\mathcal{C}_{00}}. \quad (5.6)$$

In the horizontal direction, due to the periodicity and the well-posedness of problem (4.2), we note that the value of u on the cell \mathcal{C}_{10} is related to the one on the cell \mathcal{C}_{00} as follows

$$u_k^H(\phi_k)_{\mathcal{C}_{10}} = u_k^H(E_k^{QP} \mathcal{P}_k R_k^{QP} \phi_k)_{\mathcal{C}_{00}}. \quad (5.7)$$

By induction, one easily gets that for all $p \in \mathbb{N}$ there holds

$$u_k^H(\phi_k)_{\mathcal{C}_{p0}} = u_k^H(E_k^{QP} \mathcal{P}_k^p R_k^{QP} \phi_k)_{\mathcal{C}_{00}}. \quad (5.8)$$

Combining relations (5.6) and (5.8) yields the claimed result (5.5). \square

The next result collects some useful properties of the propagation operator \mathcal{P}_k .

COROLLARY 5.5. *The operator $\mathcal{P}_k \in \mathcal{L}(H_k^{1/2}(\Sigma_{00}^\ell))$ is a compact operator with spectral radius strictly less than one.*

Proof. The compactness of $\mathcal{P}_k \in \mathcal{L}(H_k^{1/2}(\Sigma_{00}^\ell))$ follows easily from interior regularity and Sobolev compactness embedding arguments.

By definition of the space $H_k^1(\Delta, \Omega^H)$ (see Remark 5.2), $u_k^H(\phi_k)$ satisfies in particular for any $\phi_k \in H_k^{1/2}(\Sigma^H)$

$$\int_{\Omega^W} |u_k^H(\phi_k)|^2 < +\infty.$$

Due to the k -quasiperiodicity of $u_k^H(\phi_k)$, the above relation is equivalent to

$$\int_{\cup_{p \in \mathbb{N}} \mathcal{C}_{p0}} |u_k^H(\phi_k)|^2 < +\infty$$

Moreover, using Theorem 5.4, we have

$$\begin{aligned} \int_{\cup_{p \in \mathbb{N}} \mathcal{C}_{p0}} |u_k^H(\phi_k)|^2 &= \int_{p \in \mathbb{N}} \int_{\mathcal{C}_{p0}} |u_k^H(\phi_k)|^2 \\ &= \int_{p \in \mathbb{N}} \int_{\mathcal{C}_{00}} |u_k^H(E_k^{QP} \mathcal{P}_k^p R_k^{QP} \phi_k)|^2. \end{aligned}$$

Consequently, if λ is eigenvalue of \mathcal{P}_k and φ an associated eigenvector, combining the last two relations for $\phi_k = \varphi$ shows that

$$\int_{p \in \mathbb{N}} |\lambda|^p \int_{\mathcal{C}_{00}} |u_k^H(\varphi)|^2 < +\infty$$

from which we get that

$$|\lambda| < 1.$$

□

According to Theorem 5.4, the solution of the half-space problem (4.2) for a k -quasi-periodic Dirichlet condition is completely determined on the whole domain Ω^H as soon as it is known on the reference periodicity cell \mathcal{C}_{00} , provided the propagation operator \mathcal{P}_k is also known.

5.2.2. Elementary problems

Like in [17, 19], introducing elementary problems allows us to restrict the half-space problem for quasiperiodic boundary data to the determination of the propagation operator \mathcal{P}_k .

More precisely, given $\phi_k^0 \in H_k^{1/2}(\Sigma_{00}^\ell)$, let us introduce the solutions of the following problems set in the vertical strip $\Omega_0 = \bigcup_{q \in \mathbb{Z}} \mathcal{C}_{0q}$

- $E_k^\ell(\phi_k^0) \in H_k^1(\Delta, \Omega_0)$ is the unique solution of (see Figure 5.4)

$$\begin{aligned} \Delta E_k^\ell(\phi_k^0) + \rho E_k^\ell(\phi_k^0) &= 0, & \text{in } \Omega_0, \\ E_k^\ell(\phi_k^0) &= \phi_k^0, & \text{on } \Sigma_{00}^\ell, \\ E_k^\ell(\phi_k^0) &= 0, & \text{on } \Sigma_{10}^\ell, \end{aligned} \quad (5.9)$$

- $E_k^r(\phi_k^0) \in H_k^1(\Delta, \Omega_0)$ is the unique solution of (see Figure 5.4)

$$\begin{aligned} \Delta E_k^r(\phi_k^0) + \rho E_k^r(\phi_k^0) &= 0, & \text{in } \Omega_0, \\ E_k^r(\phi_k^0) &= 0, & \text{on } \Sigma_{00}^\ell, \\ E_k^r(\phi_k^0) &= \phi_k^0, & \text{on } \Sigma_{10}^\ell. \end{aligned} \quad (5.10)$$

Let us emphasize that the boundary conditions are described only for the two left lateral sides of \mathcal{C}_{00} and \mathcal{C}_{10} , as the boundary condition on Σ_{0q}^ℓ (resp. on Σ_{1q}^ℓ) for $q \in \mathbb{Z}^*$ follows directly from the one on Σ_{00}^ℓ (resp. on Σ_{10}^ℓ) by k -quasiperiodicity.

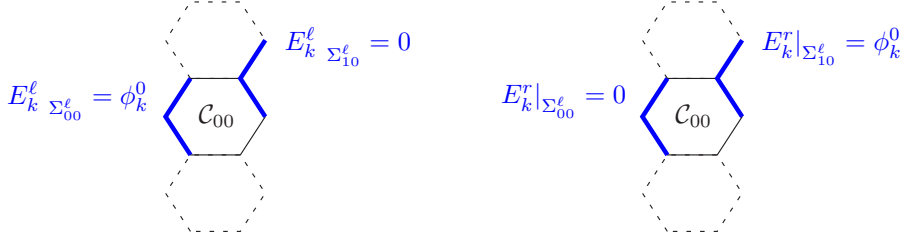


FIG. 5.4. The two strip problems for E_k^ℓ (on the left) and E_k^r (on the right)

We also introduce the elementary cell solutions

$$e_k^\ell(\phi_k^0) = E_k^\ell(\phi_k^0)|_{\mathcal{C}_{00}} \quad \text{and} \quad e_k^r(\phi_k^0) = E_k^r(\phi_k^0)|_{\mathcal{C}_{00}}.$$

Conversely, it is clear that $E_k^\ell(\phi_k^0)$ and $E_k^r(\phi_k^0)$ are uniquely determined by the above elementary cell solutions due to their quasiperiodicity. Therefore, in practice, one simply needs to solve the corresponding cell problems set in the reference periodicity cell \mathcal{C}_{00} . One might thus wonder why we have introduced the strip problems and

not directly the cell problems. In fact, it turns out that viewing the elementary cell solutions as restrictions of the strip problems leads to more compact and simpler expressions in the following.

The main advantage of these elementary problems lies in the fact that, by linearity of (4.2), one has

$$u_k^H(\phi_k)_{\Omega_0} = E_k^\ell(R_k^{QP} \phi_k) + E_k^r(\mathcal{P}_k R_k^{QP} \phi_k),$$

and then in the reference cell

$$u_k^H(\phi_k)_{\mathcal{C}_{00}} = e_k^\ell(\phi_k^0) + e_k^r(\mathcal{P}_k \phi_k^0). \quad (5.11)$$

5.2.3. The Riccati equation for the determination of the propagation operator

Assuming the elementary cell solutions are known, it remains to determine the propagation operator \mathcal{P}_k . To this end, we use the same strategy as in [17]. In short, the equation characterizing the propagation operator \mathcal{P}_k is obtained by writing the continuity of the normal derivative of u_k^H across each boundary Σ_{pq}^ℓ , which is ensured by Theorem 5.4.

To this end, we introduce four local DtN operators associated to the elementary problems (5.9) and (5.10). We refer the reader to Section 5.1.1 for the definition of the spaces $H_k^{1/2}(\Sigma_{00}^\ell)$ and $H_k^{-1/2}(\Sigma_{00}^\ell)$.

DEFINITION 5.6. *We introduce the following local DtN operators*

$$\mathcal{T}_k^{ij} \in \mathcal{L} \quad H_k^{1/2}(\Sigma_{00}^\ell), H_k^{-1/2}(\Sigma_{00}^\ell) \quad , \quad i, j \in \{\ell, r\},$$

where for all $\phi_k^0 \in H_k^{1/2}(\Sigma_{00}^\ell)$:

$$\begin{aligned} \mathcal{T}_k^{\ell\ell} \phi_k^0 &= \nabla E_k^\ell(\phi_k^0) \cdot \nu \Big|_{\Sigma_{00}^\ell} & \mathcal{T}_k^{\ell r} \phi_k^0 &= \nabla E_k^\ell(\phi_k^0) \cdot \nu \Big|_{\Sigma_{10}^\ell} \\ \mathcal{T}_k^{r\ell} \phi_k^0 &= \nabla E_k^r(\phi_k^0) \cdot \nu \Big|_{\Sigma_{00}^\ell} & \mathcal{T}_k^{rr} \phi_k^0 &= \nabla E_k^r(\phi_k^0) \cdot \nu \Big|_{\Sigma_{10}^\ell} \end{aligned}$$

where ν is the outgoing unit normal to \mathcal{C}_{00} .

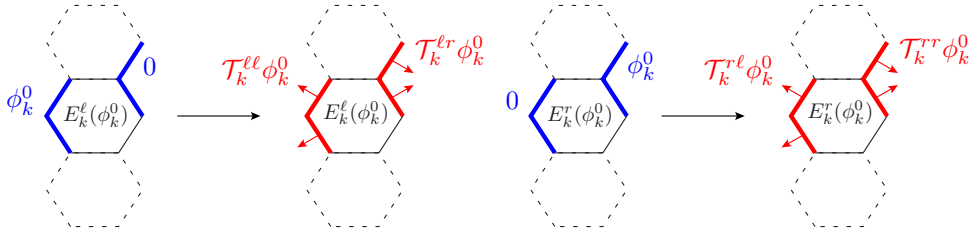


FIG. 5.5. The four local DtN operators

The characterization of the operator \mathcal{P}_k is then given by the following result.

THEOREM 5.7. *The propagation operator \mathcal{P}_k is the unique compact operator of $\mathcal{L}(H_k^{1/2}(\Sigma_{00}^\ell))$ with spectral radius strictly less than 1 solution of the stationary Riccati*

equation

$$\mathcal{T}_k^{r\ell}\mathcal{P}_k^2 + (\mathcal{T}_k^{\ell\ell} + \mathcal{T}_k^{rr})\mathcal{P}_k + \mathcal{T}_k^{\ell r} = 0. \quad (5.12)$$

Proof. The proof involves two steps: we first show that \mathcal{P}_k satisfies (5.12) and then we prove that (5.12) has a unique solution with spectral radius strictly less than 1.

Step 1: \mathcal{P}_k satisfies (5.12). First of all, according to Corollary 5.5, \mathcal{P}_k is an operator in $\mathcal{L}(H_k^{1/2}(\Sigma_{00}^\ell))$ with spectral radius strictly less than 1. Moreover, using the continuity of the normal derivative of u_k^H , we obtain using equations (5.7) and (5.11), that for any $\phi_k^0 \in H_k^{1/2}(\Sigma_{00}^\ell)$

$$\nabla E_k^\ell(\phi_k^0) + \nabla E_k^r(\mathcal{P}_k \phi_k^0) \cdot \nu_{\Sigma_{10}^\ell} = - \nabla E_k^\ell(\mathcal{P}_k \phi_k^0) + \nabla E_k^r(\mathcal{P}_k^2 \phi_k^0) \cdot \nu_{\Sigma_{00}^\ell},$$

which gives

$$\mathcal{T}_k^{\ell r}(\phi_k^0) + \mathcal{T}_k^{rr}(\mathcal{P}_k \phi_k^0) = -\mathcal{T}_k^{\ell\ell}(\mathcal{P}_k \phi_k^0) - \mathcal{T}_k^{r\ell}(\mathcal{P}_k^2 \phi_k^0).$$

Since $\phi_k^0 \in H_k^{1/2}(\Sigma_{00}^\ell)$ is arbitrary, we get

$$\mathcal{T}_k^{\ell r} + (\mathcal{T}_k^{rr} + \mathcal{T}_k^{\ell\ell})\mathcal{P}_k + \mathcal{T}_k^{r\ell}\mathcal{P}_k^2 = 0,$$

which is exactly (5.12).

Step 2: Uniqueness for (5.12). This result follows immediately from the uniqueness of the solution of (4.2). Indeed, assume that $\mathcal{P} \in \mathcal{L}(H_k^{1/2}(\Sigma_{00}^\ell))$ has a spectral radius strictly less than 1 and satisfies

$$\mathcal{T}_k^{r\ell}\mathcal{P}^2 + (\mathcal{T}_k^{\ell\ell} + \mathcal{T}_k^{rr})\mathcal{P} + \mathcal{T}_k^{\ell r} = 0.$$

Then, one can easily show that for any $\phi_k \in H_k^{1/2}(\Sigma^H)$, the function v defined in each cell \mathcal{C}_{pq} , $p \in \mathbb{N}$, $q \in \mathbb{Z}$, by

$$v|_{\mathcal{C}_{pq}} = e^{iqkL} e_k^\ell(\mathcal{P}^p R_k^{QP} \phi_k) + e_k^r(\mathcal{P}^{p+1} R_k^{QP} \phi_k),$$

belongs to $H_k^1(\Delta, \Omega^H)$ (thanks to the definition of e_k^ℓ and e_k^r and using the fact that \mathcal{P} is a solution of the Riccati equation with spectral radius strictly less than 1) and solves (4.2). Then, the uniqueness of the solution of (4.2) in $H_k^1(\Delta, \Omega^H)$ implies that

$$v = u_k^H(\phi_k),$$

and by definition of v and \mathcal{P}_k , we deduce that $\mathcal{P} = \mathcal{P}_k$. \square

By Theorem 5.4 and expression (5.11), solving the elementary problems (5.9)-(5.10) and the Riccati equation (5.12) allows us to reconstruct cell by cell the unique solution of (\mathcal{P}^H) (see (4.2)) in the case of quasiperiodic boundary data.

Finally, we deduce from the above analysis the expression of the DtN operator for quasiperiodic boundary condition:

PROPOSITION 5.8 (DtN operator for quasiperiodic boundary data). *Suppose that the data $\phi_k \in H_k^{1/2}(\Sigma^H)$, the DtN operator is given by*

$$\Lambda_k^H \phi_k = E_k^{QP} \mathcal{T}_k^{\ell\ell} R_k^{QP} \phi_k + E_k^{QP} \mathcal{T}_k^{r\ell} \mathcal{P}_k R_k^{QP} \phi_k. \quad (5.13)$$

5.2.4. Additional tools We conclude this subsection by introducing four local Dirichlet-to-Dirichlet (DtD) operators associated to the cell \mathcal{C}_{00} that will be needed in the sequel.

DEFINITION 5.9. We define the local DtD operators by setting for all $\phi_k^0 \in H_k^{1/2}(\Sigma_{00}^\ell)$:

$$\begin{aligned} \mathcal{D}_k^{\ell+} \phi_k^0 &= E_k^\ell(\phi_k^0)|_{\Gamma_{00}^+} & \text{and} & & \mathcal{D}_k^{\ell-} \phi_k^0 &= E_k^\ell(\phi_k^0)|_{\Gamma_{00}^-}, \\ \mathcal{D}_k^{r+} \phi_k^0 &= E_k^r(\phi_k^0)|_{\Gamma_{00}^+} & \text{and} & & \mathcal{D}_k^{r-} \phi_k^0 &= E_k^r(\phi_k^0)|_{\Gamma_{00}^-}. \end{aligned}$$

Identifying Σ_{00}^ℓ , Γ_{00}^- and Γ_{00}^+ , the above operators will be considered as bounded linear operators from $H_k^{1/2}(\Sigma_{00}^\ell)$ onto $H^{1/2}(\Sigma_{00}^\ell)$.

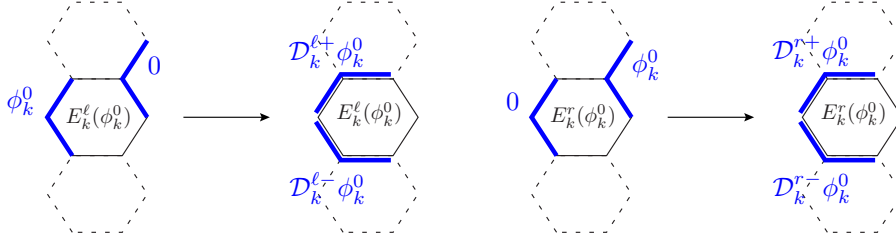


FIG. 5.6. The four local DtD operators

Using Theorem 5.4 and expression (5.11) we obtain the following result.

COROLLARY 5.10. For any $\phi_k \in H_k^{1/2}(\Sigma^H)$, for any $p \in \mathbb{N}$ and $q \in \mathbb{Z}$, we have

$$u_k^H(\phi_k)|_{\Gamma_{pq}^+} = e^{iqkL} \mathcal{D}_k^{\ell+} \mathcal{P}_k^p R_k^{QP} \phi_k + \mathcal{D}_k^{r+} \mathcal{P}_k^{p+1} R_k^{QP} \phi_k,$$

$$u_k^H(\phi_k)|_{\Gamma_{pq}^-} = e^{iqkL} \mathcal{D}_k^{\ell-} \mathcal{P}_k^p R_k^{QP} \phi_k + \mathcal{D}_k^{r-} \mathcal{P}_k^{p+1} R_k^{QP} \phi_k.$$

6. Characterization of the DtD operator This section is devoted to the determination of the DtD operator $D_{2\pi/3}$. We first show in Section 6.1 that it solves an affine equation involving an operator D^H associated with the half-space problem. Using the FB transform, we derive a semi-analytic expression for D^H in Section 6.2. Finally, we deduce in Section 6.3 an equivalent integral formulation of the affine equation which is more suitable for future numerical approximation.

6.1. The affine equation

First of all let us introduce some useful notation (see Figure 6.1): $\Sigma^H = \Sigma^- \cup \Sigma^0 \cup \Sigma^+$, $\Sigma_{2\pi/3}^- = \Theta_{2\pi/3} \Sigma^-$, $\Sigma_{2\pi/3}^+ = \Theta_{-2\pi/3} \Sigma^+$, where the center of the rotations $\Theta_{\pm 2\pi/3}$ is the center of Ω^i . Let us remind that Ω^H is the half-space at the right of Σ^H .

Let us recall that $D_{2\pi/3}$ is defined by (see Figure 2.2)

$$\begin{aligned} D_{2\pi/3} : H^{1/2}(\Sigma^i) &\longrightarrow H^{1/2}(\Sigma^H) \\ \phi &\longmapsto u^e(\phi)|_{\Sigma^H}. \end{aligned}$$

We first remark that $D_{2\pi/3}$ belongs to the affine space:

$$\mathcal{L}_{\Sigma^0} = \{ L \in \mathcal{L}(H_{2\pi/3}^{1/2}(\Sigma^i), H^{1/2}(\Sigma^H)), \forall \phi \in H_{2\pi/3}^{1/2}(\Sigma^i) \quad L\phi|_{\Sigma^0} = \phi|_{\Sigma^0} \}.$$

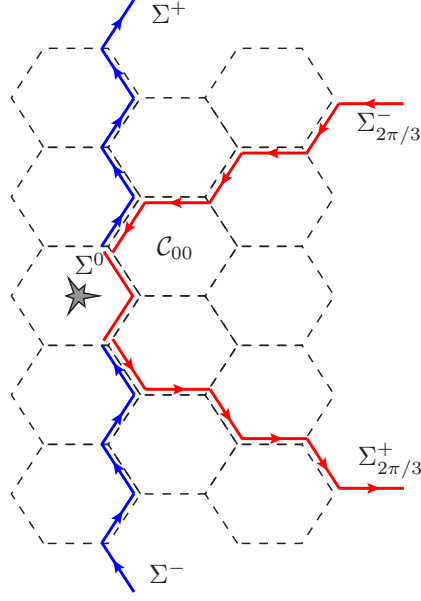


FIG. 6.1. Symmetry axis

Let us introduce, D^H , called the half-space DtD operator, defined by

$$D^H : H^{1/2}(\Sigma^H) \longrightarrow H^{1/2}(\Sigma^H)$$

$$\psi \longmapsto \begin{aligned} D^H \psi_{\Sigma^-} &\equiv u^H(\psi)_{\Sigma_{2\pi/3}^-} \\ D^H \psi_{\Sigma^0} &\equiv u^H(\psi)_{\Sigma_0} \\ D^H \psi_{\Sigma^+} &\equiv u^H(\psi)_{\Sigma_{2\pi/3}^+} \end{aligned}$$

where we have identified Σ^- and $\Sigma_{2\pi/3}^-$, Σ^+ and $\Sigma_{2\pi/3}^+$ taking into account the directions shown in Figure 6.1.

REMARK 6.1. *The range of D^H is included in $H^{1/2}(\Sigma^H)$ because for any $\psi \in H^{1/2}(\Sigma^H)$, $D^H \psi$ is nothing but the trace of the H^1 function $u^H(\psi)$ on the broken line $\Sigma_{2\pi/3}^- \cup \Sigma_0 \cup \Sigma_{2\pi/3}^+$ (identifying Σ^H with $\Sigma_{2\pi/3}^- \cup \Sigma_0 \cup \Sigma_{2\pi/3}^+$).*

We have then the following fundamental theorem

THEOREM 6.1. *The operator $D_{2\pi/3}$ is the unique solution of the problem:*

$$\text{Find } D \in \mathcal{L}_{\Sigma^0} \text{ such that } D = D^H \circ D. \quad (6.1)$$

REMARK 6.2. *Note that since \mathcal{L}_{Σ^0} is an affine space, the problem (6.1) is an affine problem, even though the equation is linear.*

Proof. Existence: We prove that the operator $D_{2\pi/3}$ is a solution of (6.1). We have already seen that

$$u^e(\phi)|_{\Omega^H} = u^H(D_{2\pi/3}\phi). \quad (6.2)$$

Moreover, since ϕ is in $H_{2\pi/3}^{1/2}(\Sigma^i)$, $u^e(\phi)$ is in $H_{2\pi/3}^1(\Omega^e)$. In particular,

- $\Sigma_{2\pi/3}^- = \Theta_{2\pi/3}\Sigma^-$ which implies $u^e(\phi)|_{\Sigma_{2\pi/3}^-} \equiv u^e(\phi)|_{\Sigma^-}$ and then $u^H(D_{2\pi/3}\phi)|_{\Sigma_{2\pi/3}^-} = u^e(\phi)|_{\Sigma^-}$ using (6.2),
- $u^e(\phi)|_{\Sigma^0} = \phi|_{\Sigma^0}$,
- $\Sigma^+ = \Theta_{2\pi/3}\Sigma_{2\pi/3}^+$ which implies $u^e(\phi)|_{\Sigma^+} \equiv u^e(\phi)|_{\Sigma_{2\pi/3}^+}$ and then $u^e(\phi)|_{\Sigma^+} = u^H(D_{2\pi/3}\phi)|_{\Sigma_{2\pi/3}^+}$ using (6.2).

Using the definition of D^H , we obtain that $D_{2\pi/3}$ solves (6.1).

Uniqueness: Let D be an operator from $H_{2\pi/3}^{1/2}(\Sigma^i)$ into $H^{1/2}(\Sigma^H)$ such that for all $\phi \in H_{2\pi/3}^{1/2}(\Sigma^i)$, $D\phi|_{\Sigma^0} = 0$ and which satisfies

$$D^H \circ D - D = 0. \quad (6.3)$$

We prove that $D = 0$. Let $\phi \in H_{2\pi/3}^{1/2}(\Sigma^i)$ and $v_0 = u^H(D\phi)$ defined in Ω^H . We have in particular

$$v_0|_{\Sigma^0} = u^H(D\phi)|_{\Sigma^0} = D\phi|_{\Sigma^0} = 0.$$

Now we build a function in the half-space $\Omega_{2\pi/3} = \Theta_{2\pi/3}\Omega^H$ by: $v_{2\pi/3} = v_0(\Theta_{2\pi/3}x)$. By a classical argument, since v_0 is solution of (4.2) in Ω^H , it is clear that $v_{2\pi/3}$ is solution of

$$\Delta v_{2\pi/3} + \rho v_{2\pi/3} = 0, \quad \text{in } \Omega_{2\pi/3},$$

while $v_0|_{\Sigma^0} = 0$ implies $v_{2\pi/3}|_{\Theta_{2\pi/3}\Sigma^0} = 0$. We are going to show that v_0 and $v_{2\pi/3}$ coincide in $\Omega^H \cap (\Theta_{2\pi/3}\Omega^H)$. The difference $d_{2\pi/3} = v_0 - v_{2\pi/3}$ satisfies

$$\Delta d_{2\pi/3} + \rho d_{2\pi/3} = 0, \quad \text{in } \Omega^H \cap (\Theta_{2\pi/3}\Omega^H), \quad (6.4)$$

with boundary condition:

$$d_{2\pi/3}|_{\Sigma^+} = v_0|_{\Sigma^+} - v_{2\pi/3}|_{\Sigma^+} = v_0|_{\Sigma^+} - v_0|_{\Sigma_{2\pi/3}^+},$$

$$d_{2\pi/3}|_{\Sigma_{2\pi/3}^-} = v_0|_{\Sigma_{2\pi/3}^-} - v_{2\pi/3}|_{\Sigma_{2\pi/3}^-} = v_0|_{\Sigma_{2\pi/3}^-} - v_0|_{\Sigma^-},$$

since $\Sigma^+ = \Theta_{2\pi/3}\Sigma_{2\pi/3}^+$, $\Sigma_{2\pi/3}^- = \Theta_{2\pi/3}\Sigma^-$ and $v_{2\pi/3} = v_0(\Theta_{2\pi/3}x)$. Using the definition of v_0 , we have

$$d_{2\pi/3}|_{\Sigma^+} = u^H(D\phi)|_{\Sigma^+} - u^H(D\phi)|_{\Sigma_{2\pi/3}^+},$$

which gives using the definitions of u^H and D^H

$$d_{2\pi/3}|_{\Sigma^+} = D\phi|_{\Sigma^+} - D^H \circ D\phi|_{\Sigma^+},$$

and then by (6.3)

$$d_{2\pi/3}|_{\Sigma^+} = 0. \quad (6.5)$$

In the same way, we have :

$$d_{2\pi/3} \Sigma_{2\pi/3}^- = u^H(D\phi) \Sigma_{2\pi/3}^- - u^H(D\phi)|_{\Sigma^-},$$

and then, using again the definition of u^H and D^H

$$d_{2\pi/3} \Sigma_{2\pi/3}^- = D\phi \Sigma_{2\pi/3}^- - D^H \circ D\phi \Sigma_{2\pi/3}^- = 0. \quad (6.6)$$

A uniqueness argument for the Dirichlet problem (6.4), (6.5), (6.6) yields $v_{2\pi/3} = v_0$ in $\Omega^H \cap (\Theta_{2\pi/3}\Omega^H)$.

With the same argument, we can construct three solutions of the Helmholtz equation $v_0, v_{2\pi/3}, v_{4\pi/3}$ respectively in the domains $\Omega^H, \Theta_{2\pi/3}\Omega^H$ and $\Theta_{4\pi/3}\Omega^H$ and which coincide in the domains where they are jointly defined:

- $v_0 = v_{2\pi/3}$ in $\Omega^H \cap (\Theta_{2\pi/3}\Omega^H)$,
- $v_{2\pi/3} = v_{4\pi/3}$ in $(\Theta_{2\pi/3}\Omega^H) \cap (\Theta_{4\pi/3}\Omega^H)$,
- $v_{4\pi/3} = v_0$ in $(\Theta_{4\pi/3}\Omega^H) \cap \Omega^H$.

Thus we can construct a function $U^e \in H^1(\Omega^e)$ defined in Ω^e by

$$U^e \Theta_{k\pi/3}\Omega^e = v_{k\pi/3}, \quad k \in \{0, 2, 4\},$$

so that U^e is an H^1 -function which satisfies

$$\Delta U^e + \rho U^e = 0, \quad \text{in } \Omega^e,$$

with homogeneous Dirichlet condition on Σ^i . From the uniqueness for the exterior problem we get $U^e = 0$ in Ω^e and therefore $D\phi|_{\Sigma^i} = U^e|_{\Sigma^i} = 0$. This concludes the proof of Theorem 6.1. \square

6.2. Characterization of the half-space DtD operator

Let us recall the definition of D^H :

$$\begin{aligned} D^H : H^{1/2}(\Sigma^H) &\longrightarrow H^{1/2}(\Sigma^H) \\ \psi &\longmapsto \begin{aligned} D^H \psi|_{\Sigma^-} &\equiv u^H(\psi) \Sigma_{2\pi/3}^- \\ D^H \psi|_{\Sigma^0} &\equiv u^H(\psi)|_{\Sigma^0} \\ D^H \psi|_{\Sigma^+} &\equiv u^H(\psi) \Sigma_{2\pi/3}^+ \end{aligned} \end{aligned},$$

where we have identified Σ^- and $\Sigma_{2\pi/3}^-$, Σ^+ and $\Sigma_{2\pi/3}^+$ taking into account the directions shown in Figure 6.1.

Thanks to the results of Section 5, we can give a semi-analytic expression for the DtD operator D^H .

PROPOSITION 6.2. *For any ψ in $H^{1/2}(\Sigma^H)$ and for any ξ in $(-\pi/L, \pi/L)$, we have*

$$\begin{aligned} \mathcal{F}_y(D^H \psi)(\cdot, \xi) &= \frac{L}{2\pi} \int_{-\pi/L}^{\pi/L} e^{i\xi L} \mathcal{D}_k^{\ell+} + \mathcal{D}_k^{r+} \mathcal{P}_k \mathcal{I} - \mathcal{P}_k e^{i\xi L} \mathcal{R}_k^{QP} \psi_k dk \\ &+ \frac{L}{2\pi} \int_{-\pi/L}^{\pi/L} \psi_k|_{\Sigma^0} dk \\ &+ \frac{L}{2\pi} \int_{-\pi/L}^{\pi/L} e^{-i(k+\xi)L} \mathcal{D}_k^{\ell-} + \mathcal{D}_k^{r-} \mathcal{P}_k \mathcal{I} - \mathcal{P}_k e^{-i(k+\xi)L} \mathcal{R}_k^{QP} \psi_k dk, \end{aligned} \quad (6.7)$$

where $\psi_k = \mathcal{F}_y \psi(\cdot, k)$, the local DtD operators $\mathcal{D}_k^{\ell\pm}$ and $\mathcal{D}_k^{r\pm}$ are given in Definition 5.9 and \mathcal{P}_k is the propagation operator defined in Section 5.2.1.

REMARK 6.3. Let us remark that the subscript k of the operators in formula (6.7) means that they actually depend on the variable k .

Proof. Let $k \in (-\pi/L, \pi/L)$, we express first $D^H \psi_k$ for k -quasiperiodic boundary data $\psi_k \in H_k^{1/2}(\Sigma^H)$. By definition of D^H , we are then interested in expressing $u_k^H(\psi_k)|_{\Sigma_{2\pi/3}^-}$, $u_k^H(\psi_k)|_{\Sigma^0}$ and $u_k^H(\psi_k)|_{\Sigma_{2\pi/3}^+}$. Using notation of Section 5.2, let us remark that

$$\Sigma_{2\pi/3}^- = \int_{n=+\infty}^0 \Gamma_{n0}^+, \quad \Sigma_{2\pi/3}^+ = \int_{n=0}^{+\infty} \Gamma_{n,-(n+1)}^-,$$

taking into account the directions shown in Figures 6.1 and 5.2.

Using Corollary 5.10, we have

- on $\Sigma_{2\pi/3}^-$, for all $n \in \mathbb{N}$,

$$u_k^H(\psi_k)|_{\Gamma_{n0}^+} = \mathcal{D}_k^{\ell+} \mathcal{P}_k^n + \mathcal{D}_k^{r+} \mathcal{P}_k^{n+1} R_k^{QP} \psi_k$$

and $D^H \psi_k|_{\Sigma_n^-} = u_k^H(\psi_k)|_{\Gamma_{n0}^+}$ where we have denoted $\Sigma_n^- = \Theta_{-2\pi/3} \Gamma_{n0}^{\ell+}$;

- on Σ^0

$$D^H \psi_k|_{\Sigma^0} = u_k^H(\psi_k)|_{\Sigma^0} = \psi_k|_{\Sigma^0};$$

- on $\Sigma_{2\pi/3}^+$, for all $n \in \mathbb{N}$,

$$u_k^H(\psi_k)|_{\Gamma_{n,-(n+1)}^-} = e^{-i(n+1)kL} \mathcal{D}_k^{\ell-} \mathcal{P}_k^n + \mathcal{D}_k^{r-} \mathcal{P}_k^{n+1} R_k^{QP} \psi_k$$

and $D^H \psi_k|_{\Sigma_n^+} = u_k^H(\psi_k)|_{\Gamma_{n,-(n+1)}^-}$ where $\Sigma_n^+ = \Theta_{2\pi/3} \Gamma_{n,-(n+1)}^-$.

For any data $\psi \in H^{1/2}(\Sigma^H)$, we use the FB transform and formula (5.2) to obtain the expression "piece by piece" of $D^H \psi$ from $\psi_k = \mathcal{F}_y \psi(\cdot, k)$

- on $\Sigma^- = \cup_{n \in \mathbb{N}} \Sigma_n^-$, for all $n \in \mathbb{N}$,

$$D^H \psi|_{\Sigma_n^-} = \int_{-\pi/L}^{\pi/L} \frac{\overline{L}}{2\pi} \mathcal{D}_k^{\ell+} \mathcal{P}_k^n + \mathcal{D}_k^{r+} \mathcal{P}_k^{n+1} R_k^{QP} \psi_k dk;$$

- on Σ^0

$$D^H \psi|_{\Sigma^0} = \int_{-\pi/L}^{\pi/L} \frac{\overline{L}}{2\pi} \psi_k|_{\Sigma^0} dk;$$

- on $\Sigma^+ = \cup_{n \in \mathbb{N}} \Sigma_n^+$, for all $n \in \mathbb{N}$,

$$D^H \psi|_{\Sigma_n^+} = \int_{-\pi/L}^{\pi/L} \frac{\overline{L}}{2\pi} e^{-i(n+1)kL} \mathcal{D}_k^{\ell-} \mathcal{P}_k^n + \mathcal{D}_k^{r-} \mathcal{P}_k^{n+1} R_k^{QP} \psi_k dk.$$

We finally apply the FB transform in the y - direction to $D^H \psi$:

$$\mathcal{F}_y(D^H \psi)(\cdot, \xi) = \frac{\overline{L}}{2\pi} \sum_{n=-\infty}^0 D^H \psi|_{\Sigma_n^-} e^{i\xi(n+1)L} + D^H \psi|_{\Sigma^0} + \sum_{n=0}^{\infty} D^H \psi|_{\Sigma_n^+} e^{-i\xi(n+1)L}.$$

By inverting the integral over $(-\pi/L, \pi/L)$ and the sum over n , we are led to use the following formula:

$$\mathcal{P}_k^n e^{\pm i(n+1)\zeta L} = e^{\pm i\zeta L} \mathcal{I} - \mathcal{P}_k e^{\pm i\zeta L} \quad (6.8)$$

with $\zeta = k$ or $\zeta = k + \xi$. Note that this is possible as for every k , \mathcal{P}_k is compact with spectral radius strictly less than 1. Actually, we could prove like in [17] that for $\rho_b > 0$ (defined in (1.5)), the spectral radius $\rho(\mathcal{P}_k)$ of \mathcal{P}_k is uniformly bounded in k , by a constant that is strictly less than 1:

$$\exists C > 0, \forall k \in \left[-\frac{\pi}{L}, \frac{\pi}{L}\right], \quad \rho(\mathcal{P}_k) \leq e^{-C\rho_b}.$$

The property

$$\lim_{n \rightarrow +\infty} \|\mathcal{P}_k^n\|^{1/n} = \rho(\mathcal{P}_k)$$

for the norm of $\mathcal{L}(L^2(\Sigma_{00}^\ell))$ ([41]) implies that for some $\alpha \in]e^{-C\rho_b}, 1[$, j large enough we have for all k

$$\|\mathcal{P}_k^j\| \leq \alpha^j,$$

which yields the absolute convergence of the series (6.8). Therefore, for each ζ , $\mathcal{I} - \mathcal{P}_k e^{\pm i\zeta L}$ is invertible and the sum (6.8) converges uniformly in the norm of $\mathcal{L}(L^2(\Sigma_{00}^\ell))$. Exchanging the order of the integral and the sum is then possible. \square

REMARK 6.4. *Our choice of solving a family of k -quasiperiodic half-space problems instead of a family of k -quasiperiodic half waveguide problems simplifies the expression of D^H . Indeed, expressing $u^H(\phi)$ on $\Sigma_{2\pi/3}^\pm$ is much easier by doing so.*

6.3. Towards the integral equation

Let us give now more precisions about the resolution of the affine equation (6.1). Since the operator D^H is characterized via its FB transform, it makes sense to reformulate (6.1) using the FB transform.

COROLLARY 6.3. *For any $\phi \in H_{2\pi/3}^{1/2}(\Sigma^i)$, the function*

$$\psi_{2\pi/3} := \mathcal{F}_y(D_{2\pi/3}\phi) \in H_{QP}^{1/2}(\Sigma^H \times \left[-\frac{\pi}{L}, \frac{\pi}{L}\right])$$

is the unique solution to the following problem

$$\text{Find } \psi \in H_{QP}^{1/2}(\Sigma^H \times \left[-\frac{\pi}{L}, \frac{\pi}{L}\right]), \text{ such that,}$$

$$\left\{ \begin{array}{l} (i) \quad \forall \xi \in \left[-\frac{\pi}{L}, \frac{\pi}{L}\right], \quad \psi(\cdot, \xi) - \int_{-\pi/L}^{\pi/L} K^H(k, \xi) \psi(\cdot, k) dk = 0, \\ (ii) \quad \frac{\overline{L}}{2\pi} \int_{-\pi/L}^{\pi/L} \psi(\cdot, k)|_{\Sigma^0} dk = \phi|_{\Sigma^0}, \end{array} \right. \quad (6.9)$$

where $K^H(k, \xi) \in \mathcal{L} \left(H_k^{1/2}(\Sigma^H), H_\xi^{1/2}(\Sigma^H) \right)$ is given by

$$\begin{aligned} K^H(k, \xi) &= \frac{L}{2\pi} e^{i\xi L} \mathcal{D}_k^{\ell+} + \mathcal{D}_k^{r+} \mathcal{P}_k \quad \mathcal{I} - \mathcal{P}_k e^{i\xi L} \quad^{-1} R_k^{QP} \\ &+ \frac{L}{2\pi} R^H \\ &+ \frac{L}{2\pi} e^{-i(k+\xi)L} \mathcal{D}_k^{\ell+} + \mathcal{D}_k^{r+} \mathcal{P}_k \quad \mathcal{I} - \mathcal{P}_k e^{-i(k+\xi)L} \quad^{-1} R_k^{QP}, \end{aligned}$$

with R^H the restriction operator from Σ^H on Σ^0 defined in Section 4. Relation (6.9)-(i) is the FB transform of Equation (6.1) while relation (6.9)-(ii) expresses in terms of the FB-variables the condition:

$$D_{2\pi/3} \phi|_{\Sigma^0} = \phi|_{\Sigma^0}.$$

From a practical point of view, it seems to us that it is easier to solve (6.9) instead of (6.1). The advantage is to replace the discretization of an infinite set by the discretization of a compact set.

7. Summary and conclusion In this paper, we proposed a method to solve scattering problems in infinite hexagonal periodic media containing local perturbations. We have computed the Dirichlet-to-Neumann map on the boundary of a bounded domain which respects the hexagonal geometry. By doing so, the initial problem is reduced to the solution of a boundary value problem set in a cell containing the defect. The computation of the DtN map Λ is based on a factorization through a half-space DtN operator Λ^H and a DtD operator $D_{2\pi/3}$ (see Theorem 4.1). We sum up below the main steps to be followed in order to compute $\Lambda\phi$, for a given boundary data with hexagonal symmetry $\phi \in H_{2\pi/3}^{1/2}(\Sigma^i)$.

1. Pre-processing steps

- For all $k \in (-\pi/L, \pi/L)$
- (a) Solve the cell problems (5.9)-(5.10)
 - (b) Compute the local DtN operators (see Definition (5.6))
 - (c) Compute the local DtD operators (see Definition (5.9))
 - (d) Solve the stationary Riccati equation (5.12)
 - (e) Compute Λ_k^H thanks to relation (5.13)

2. Solve integral equation (6.9) using the steps (1)-(c) and (1)-(d) to obtain

$$\psi_{2\pi/3} = \mathcal{F}_y D_{2\pi/3} \phi$$

3. Using relation (5.3),

$$\Lambda \phi = \frac{\overline{L}}{2\pi} \int_{-\pi/L}^{\pi/L} \Lambda_k^H \psi_{2\pi/3}(\cdot, k) dk$$

The pre-processing steps only involve the solution of elementary problems set on bounded domains, for each values of k . These steps can be easily parallelized as the problems for different values of k are decoupled. Solving the integral equation (6.9) constitutes the main difficulty in implementing the algorithm. The discretization and numerical investigation of the problem will be considered in a forthcoming article.

REFERENCES

- [1] Y. AKAHANE, T. ASANO, B.-S. SONG, AND S. NODA. *Fine-tuned high- q photonic-crystal nanocavity*. **Opt. Express**, **13** (2005), pp. 1202–1214.
- [2] G. ALLAIRE, C. CONCA AND M. VANNINATHAN. *Spectral asymptotics of the Helmholtz model in fluid-solid structures* **Int. J. Numer. Meth. Engng.**, **46** (1999), pp. 1463–1504.
- [3] H. AMMARI, H. KANG, AND K. LEE. *Asymptotic analysis of high-contrast phononic crystals and a criterion for the band-gap opening*. **Arch. Ration. Mech. Anal.**, **193** (2009), pp. 679–714.
- [4] A. ÁVILA, G. GRISO AND B. MIARA. *Bandes phononiques interdites en élasticité linéarisée*. **C. R. Math. Acad. Sci. Paris**, **340** (2005), pp. 933–938.
- [5] A.-S. BONNET-BEN DHIA AND K. RAMDANI. *Diffraction by an acoustic grating perturbed by a bounded obstacle*. **Adv. Comput. Math.**, **16** (2002), pp. 113–138.
- [6] S. BOSCOLO, M. MIDRIO AND T. F. KRAUSS. *Y junctions in photonic crystal channel waveguides: high transmission and impedance matching*. **Opt. Lett.**, **27** (2002), pp. 1001–1003.
- [7] G. BOUCHITTÉ, S. GUENNEAU AND F. ZOLLA. *Homogenization of dielectric photonic quasi crystals* **Multiscale Model. Simul.**, **8** (2010), pp. 1862–1881.
- [8] K. BUSCH, G. VON FREYMAN, S. LINDEN, S.F. MINGALEEV, L. TKESHELASHVILI, AND M. WEGENER. *Periodic nanostructures for photonics*. **Physics Reports**, **444** (2007), pp. 101–202.
- [9] K. DOSSOU, M.-A. BYRNE, AND L.-C. BOTTEN. *Finite element computation of grating scattering matrices and application to photonic crystal band calculations*. **J. Comput. Phys.**, **219** (2006), pp. 120–143.
- [10] W. E AND D. LI. *On the crystallization of 2D hexagonal lattices*. **Comm. Math. Phys.**, **286** (2009), pp. 1099–1140.
- [11] A.-G. EDELMANN AND S.-F. HELFERT. *Three-dimensional analysis of hexagonal structured photonic crystals using oblique coordinates*. **Optical and Quantum Electronics**, **41** (2009), pp. 243–254.
- [12] M. EHRHARDT, H. HAN, AND C. ZHENG. *Numerical simulation of waves in periodic structures*. **Commun. Comput. Phys.**, **5** (2009), pp. 849–870.
- [13] M. EHRHARDT AND C. ZHENG. *Exact artificial boundary conditions for problems with periodic structures*. **J. Comput. Phys.**, **227** (2008), pp. 6877–6894.
- [14] S. FAN, S.-G. JOHNSON, J.-D. JOANNOPOULOS, C. MANOLATOU, AND H.-A. HAUS. *Waveguide branches in photonic crystals*. **J. Opt. Soc. Am. B**, **18** (2001), pp. 162–165.
- [15] A. FIGOTIN AND A. KLEIN. *Localized classical waves created by defects*. **J. Statist. Phys.**, **86** (1997), pp. 165–177.
- [16] A. FIGOTIN AND A. KLEIN. *Midgap defect modes in dielectric and acoustic media*. **SIAM J. Appl. Math.**, **58** (1998), pp. 1748–1773.
- [17] S. FLISS. *Etude mathématique et numérique de la propagation des ondes dans des milieux périodiques localement perturbés*. (Thèse, Ecole Polytechnique, 2010).
- [18] S. FLISS, E. CASSAN AND D. BERNIER. *New approach to describe light refraction at the surface of a photonic crystal*. **J. Opt. Soc. Am. B**, **27** (2010), pp. 1492–1503.
- [19] S. FLISS AND P. JOLY. *Exact boundary conditions for time-harmonic wave propagation in locally perturbed periodic media*. **Appl. Numer. Math.**, **59** (2009), pp. 2155–2178.
- [20] R.-C. GAUTHIER, K. MNAYMNEH, S. NEWMAN, K.-E. MEDRI, AND C. RAUM. *Hexagonal array photonic crystal with photonic quasi-crystal defect inclusion*. **Optical Materials**, **31** (2008), pp. 51–57.
- [21] R.-C. GAUTHIER. *FDTD analysis of out-of-plane propagation in 12-fold photonic quasi-crystals*. **Optics Communications**, **269** (2007), pp. 395–410.
- [22] Z. HU AND Y. LU. *Improved Dirichlet-to-Neumann map method for modeling extended photonic crystal devices*. **Optical and Quantum Electronics**, **40** (2008), pp. 921–932.
- [23] J.-D. JOANNOPOULOS, R.-D. MEADE AND N.-J. WINN. *Photonic Crystal- Molding the flow of light*, (Volume 405, Princeton University Press. 1, 1995).
- [24] S. JOHNSON AND J.-D. JOANNOPOULOS. *Photonic Crystal - The road from theory to practice*. (Kluwer Acad. Publ. 1, 2002).
- [25] P. JOLY, J.-R. LI AND S. FLISS. *Exact boundary conditions for periodic waveguides containing a local perturbation*. **Commun. Comput. Phys.**, **1** (2006), pp. 945–973.
- [26] P. KERDELHUÉ. *Spectre de l'opérateur de Schrödinger magnétique avec symétrie d'ordre six*. **Mém. Soc. Math. France (N.S.)**, **51** (1992), pp. 139.
- [27] R. KRESS. *Linear integral equations*, **82** (New York, 1999).
- [28] P. KUCHMENT. *The mathematics of photonic crystals*, volume 22 of **Mathematical modeling in optical science**. (SIAM, Philadelphia, 2001).
- [29] H. LE DRET AND A. RAOULT. *Homogenization of hexagonal lattices*. **C. R. Math. Acad. Sci. Paris**, **349** (2011), pp. 111–114.
- [30] D. LEVINE AND P.-J. STEINHARDT. *Quasicrystals: A new class of ordered structures*. **Phys. Rev. Lett.**, **53** (1984), pp. 2477–2480.

- [31] M. MALDOVAN AND E.-L. THOMAS. *Periodic materials and interference lithography for photonics, phononics and mechanics*. (Wiley-VCH, 2008).
- [32] S. A. PHANI, J. WOODHOUSE AND N.-A. FLECK. *Wave propagation in two-dimensional periodic lattices*. **J. Acoust. Soc. Am.**, **119** (2006), pp. 1995–2005.
- [33] M. QIU, M. MULOT, M. SWILLO, S. ANAND, B. JASKORZYNSKA, A. KARLSSON, M. KAMP AND A. FORCHEL. *Photonic crystal optical filter based on contra-directional waveguide coupling*. **Appl. Phys. Lett.**, **83** (2003), pp. 5121–5123.
- [34] M. REED AND B. SIMON. *Methods of modern mathematical physics. IV. Analysis of operators*. (Academic Press [Harcourt Brace Jovanovich Publishers], New York, 1978).
- [35] W. M. ROBERTSON AND J. F. RUDY III. *Measurement of acoustic stop bands in two-dimensional periodic scattering arrays*. **J. Acoust. Soc. Amer.**, **104** (1998), pp. 694–699.
- [36] C.-J. RUPP, A. EVGRAFOV, K. MAUTE, AND M.-L. DUNN. *Design of phononic materials/structures for surface wave devices using topology optimization*. **Struct. Multidiscip. Optim.**, **34** (2007), pp. 111–121.
- [37] K. SAKODA. *Optical Properties of Photonic Crystals*. (Optical Sciences, Springer, 2 edition, Basel, 2004).
- [38] A. SPADONI, M. RUZZENE, S. GONELLA, AND F. SCARPA. *Phononic properties of hexagonal chiral lattices*. **Wave Motion**, **46** (2009), pp. 435–450.
- [39] A. TALNEAU, L. LE GOUEZIGOU, N. BOUADMA, M. KAFESAKI, C. M. SOUKOULIS AND M. AGIO. *Photonic-crystal ultrashort bends with improved transmission and low reflection at 1.55 μ m*. **Appl. Phys. Lett.**, **80** (2002), pp. 547–549.
- [40] Y. TANAKA, T. YANO AND S.-I. TAMURA. *Surface guided waves in two-dimensional phononic crystals*. **Wave Motion**, **44** (2007), pp. 501–512.
- [41] J. WEIDMANN. *Linear operators in Hilbert spaces*, (volume 68, New York, 1980).
- [42] L. YUAN AND Y.-Y. LU. *An efficient bidirectional propagation method based on Dirichlet-to-Neumann maps*. **IEEE Photonics Technology Letters**, **18** (2006), pp. 1967–1969.
- [43] L. YUAN AND Y.-Y. LU. *A recursive-doubling Dirichlet-to-Neumann map method for periodic waveguides*. **J. Lightwave Technol.**, **25** (2007), pp. 3649–3656.